

06-21-00

A

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)*(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
30408

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

PULTRUDED PART AND METHOD OF PREPARING A REINFORCEMENT MAT FOR THE PART

and invented by:

Kenneth D. Beer, Laurence W. Davies, and Peter J. FritzIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 36 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

30408

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 7
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☐ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL 409044870US

06/20/00
1c839 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
30408

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☒ Additional Enclosures (please identify below):


Assignment from Kenneth D. Beer to Pella Corporation, with recordation fee
Assignment from Laurence W. Davies to Omniglass Ltd., with recordation fee
Assignment from Omniglass Ltd. to Pella Corporation, with recordation fee
Assignment from Peter J. Davies to Pella Corporation, with recordation fee

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	64	- 20 =	44	x \$18.00	\$792.00
Indep. Claims	5	- 3 =	2	x \$78.00	\$156.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,638.00

- ☒ A check in the amount of **\$1,638.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-0522** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

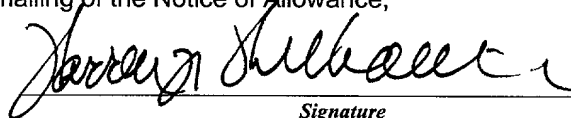
Signature

Dated: June 20, 2000

CC:

06/20/00

1c338 U.S. PTO

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

Applicant(s): **Kenneth D. Beer, Laurence W. Davies and Peter J. Fritz**

Docket No.
30408

Serial No.

Filing Date

Examiner

Group Art Unit

Invention: **PULTRUDED PART AND METHOD OF PREPARING A REINFORCEMENT FOR THE PART**

1c520 U.S. PTO
09/597453

06/20/00

I hereby certify that the following correspondence:

Patent Application: Description, Claims, Abstract, 7 pages drawings, Combined Declarations and Powers of Attorney (3), Assignments and Recordation fees (4), Assignment Cover Sheets (4), and Transmittal, \$1,638 Filing Fee

(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on

June 20, 2000
(Date)

Jeanette L. Linville

(Typed or Printed Name of Person Mailing Correspondence)

Jeanette L. Linville
(Signature of Person Mailing Correspondence)

EL 409044870US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

PULTRUDED PART AND METHOD OF
PREPARING A REINFORCEMENT MAT FOR THE PART

5 Related Applications

This application claims priority under 35 U.S.C. 119 from provisional application Serial No. 60/155258 filed June 21, 1999. Provisional application Serial No. 60/155258 is fully incorporated herein by specific reference thereto.

10 Background of the Invention

1. Field of the Invention

This invention relates to a mat for use as reinforcement for the resin composition used in pultrusion of a pultruded part, and to a part which has been pultruded using the improved mat as a reinforcement for the resin composition. In particular, the invention concerns an improved reinforcement mat made up of a number of layers, including a layer having fibers which extend transversely of the mat, fibers that are oriented longitudinally of the mat, fibers that are arranged obliquely of the longitudinal and transverse fibers, entangling fibers that extend into the other fiber layers, and a binding resin for the fibers.

The invention is especially useful for pultrusion of parts for fenestration products and relates to a reinforcement mat for the pultrusion resin. Representative fenestration products in this respect include items such as pultruded window jambs, sills, heads, sash stiles or sash rails.

2. Description of the Prior Art

Pultrusion is a known technique in which longitudinally continuous fibrous elements, which can include roving and/or a mat, are combined into a structure. The process generally involves the pulling of the rovings and mats through a resin bath, and into a heated forming die. The heat of the die cures the resin, and the part is pulled through the die, on a continuous basis. The mat and roving are textile-type products, as they are flexible and conformable. Current pultruded parts are generally 1/4" or thinner, and in the fenestration industry, range from 0.07" - 0.1" thick. The pultruded parts are solid structures, and generally have a profile such as a box,

or open section, where the bends in the thin-profile give the pultrusion a high-degree of rigidity and structural integrity.

Mat and roving composite reinforcements are primarily glass products, while the resin matrix is usually, but not necessarily, a thermosetting polyester. Mat material is generally in the form of a non-woven mat, where glass fibers are randomly placed in a planar swirl pattern, resulting in a felt-like web.

Before pultrusion, glass rovings are groupings of up to thousands of microns-diameter glass fibers, that mechanically behave like flexible rope, because the diameter of each filament is so small, even though it is made of glass, commonly considered to be a rigid material. After pultrusion, the glass rovings are held together by the matrix resin, resulting in the rigidity of the pultrusion composite parts. In a pultrusion profile, the mat and roving constitute the reinforcement, while the resin constitutes the matrix of the solid composite.

The technique of pultrusion has been used for many years for manufacturing various parts including simple parts such as rods and more recently including parts of more complex and thinner cross-section. One requirement for thinner parts is that of providing fibers in the construction which are transverse to the length of the part to provide transverse strength.

The longitudinal strength of pultruded parts is very high since the majority of the fibers extend longitudinally in the form of a series of longitudinally extending rovings pulled through the die. However the transverse strength of pultruded parts is generally compromised because only a limited number of the fibers extend transversely.

Mats having transverse fibers and placed on opposite sides of the outside of a pultruded part have been tried in the past. Various types of mat materials are available but the mat material which is principally used is one in which the fibers are laid in random patterns in a flat layer and the fibers then held together by a binder which acts to attach crossing fibers at the junctions to form a two dimensional structure. This type of mat has high shear resistance due to the large number of interconnections between the randomly oriented fibers. However the main intention of the mat is to provide a high proportion of the fibers extending in the transverse direction and this is not achieved since the fibers extend in random directions. Therefore, only a very small proportion of the total fiber component extends in the transverse direction.

It has long been recognized that the absence of a suitable mat has significantly reduced the quality of pultrusions particularly in regard to the transverse strength, thus leading to limited penetration of pultruded parts into various marketplaces.

The conventional mat has also a number of serious problems which interfere with the efficiencies and economics of the pultrusion process.

First, the mat is a relatively expensive, and there is waste of offal when the mat is slit to width.

Second, the mat is difficult to form into the required complex shapes. Thick, strong mats are available but they are more difficult to bend and shape, before entering the die. Lightweight mats are easier to shape, but they lack transverse strength, and are more prone to ripping-out at the die entrance.

The choice of mat is therefore a compromise between the necessity for bending to shape and the required strength of the pultruded part.

More recently, mats have become available that are needled in a direction at right angles to the plane of the mat, to provide loops that cooperate with the rovings, and also form a mat structure which has greater bond strength in the through-thickness direction, to provide necessary pull strength. This mat has a tendency to stretch, and is very expensive, thus interfering with the economics of the pultrusion process.

Available reinforcing mats that are needled use continuous fibers rather than cut-staple fibers in order to provide the highest strength of the fibers. However, the needling tends to break at least some of the pulled glass fibers in order to effect their distortion from the plane of the mat, thus reducing the strength of the mat, because many of the fibers have been broken by needling.

United States Patent 4,058,581 (Park) discloses an attempt to attach discontinuous fibers to longitudinally continuous fibers by simply adding these into the bath of resin so that they may be picked up by the longitudinal fibers as they pass through the resin. There is no assertion by the supplier that this leads to a layer of transverse fibers in the part wall and it is believed that any fibers so attached would simply be pulled straight and longitudinal by passage through the die.

United States Patent 5,324,377 (Davies, one of the inventors herein) discloses a technique to add fibers transverse to the length of the part by extruding those fibers into the

outside of the part so that they are carried with the part through the die. Unfortunately this technique has not yet led to significant success so that the requirement for an improved mat has remained largely unfulfilled.

In order for the reinforcing mat to pass through the die with the longitudinal fibers, it is necessary for the mat to have a sufficient longitudinal strength that it does not tear as it is pulled through the die. Furthermore the mat must have a sufficient shear strength so that it does not twist or skew allowing one side edge of the mat to move in advance of the other side edge. If such twisting or skewing occurs, the mat will become distorted in the part and the mat eventually will break down if the distortion goes beyond a certain level thus bringing down the process and requiring a re-start.

The term "shear strength" used herein therefore relates to the resistance of the mat to twisting or skewing in the plane of the mat in a direction such that one edge of the mat moves in advance of the other edge of the mat.

Summary Of The Invention

The present invention overcomes the problems outlined above and provides an improved mat for use as reinforcement for a resin composition to be used in forming an elongated, pultruded part of constant transverse cross-section using a pultrusion die. The mat includes a first layer of continuous, generally longitudinally-extending fibers which provide longitudinal strength and increased modulus to the mat. A second layer of generally transverse reinforcement fibers is provided in association with the first layer of generally longitudinal fibers with the transverse fibers being oriented at an angle to provide transverse strength and increased modulus to the mat and thereby to the final pultruded part. A third layer of diagonal transport fibers for the transverse reinforcement fibers is provided with certain of the transport fibers preferably extending diagonally in one direction with respect to the first layer of generally longitudinally-extending fibers, and other fibers extending diagonally at an opposite, essentially equal angle to provide shear strength and increased modulus and anti-skewing resistance and stiffness to the mat when used for pultrusion of a part. A batting layer, preferably made up of B-staged thermoset or thermoplastic fibers, is provided with at least a portion of the batting fibers extending through the thickness of the mat layers to interconnect

the fibers of all of the layers to thereby increase the shape-retaining capability of the mat during pultrusion of the part.

The fibers of the longitudinally-extending first layer, the transverse layer and the transport layer are preferably glass fibers in the form of rovings of required individual cross-sectional area.

A quantity of a binding agent is also preferably provided which bonds all of the layers of the mat together. The binding agent is either added separately to the mat layers during preparation thereof, and may comprise a powder, solvent, thermal, or aqueous-based thermoplastic binder which adheres to the multiple layers of the mat and/or the interstices within a given layer.

Mat stiffness is the capability of the mat to retain its shape when subjected to tensile loading, and when subjected to shear loading, as a mat. Mat stiffness can be viewed as resistance to wrinkling and distortion when loaded by pulling, or by bending, which occurs when the mat is pulled over various shaped preformers, before the mat enters the die. With greater mat stiffness, mat skewing is reduced.

Mat strength and increased modulus as used herein is the ability of the mat to carry a load without distorting, tearing, stretching due to slippage or shearing between reinforcements, or stretching due to a compressive wrinkling or "buckling" of a reinforcement constituent of the mat. The mat strength and increased modulus is generally measured in pounds per lineal inch in a given direction.

The strength and increased modulus of the pultruded part refers primarily to the load-bearing capability of the pultruded part including transverse normal strength and transverse shear strength. The transverse strength of the pultruded part, generally indicated as "strength," or strength and increased modulus as used herein, allows for greater loading in the transverse direction, greater flex strength in the transverse direction, and resistance to tearing or cleaving in the longitudinal direction, for the pultruded part.

In the improved method of preparing a mat for use in reinforcing a pultrusion resin, the lay-up of mat layers including the fibrous batting layer are subjected to water-jets from hydro-entangling apparatus or from a series of barbed needles directed into the layered mat, both of which function to deflect the fibers of the batting layer to produce entangling fibers that extend through the thickness of the mat layers and interconnect the fibers of the layers, thus increasing

the shape-retaining capability of the mat. Shape-retaining capability means the ability of the mat to resist skewing of the edges of the mat relatively, and resistance to undesirable deformation that would decrease its reinforcing properties.

Preferably, the longitudinally-extending fibers as well as the transverse and oblique fibers of the mat are glass fibers. However, the entangling fibers extending from the batting desirably have a bending resistance less than that of the glass fibers. To this end, the batting is preferably of a cut-staple, synthetic resin material such as a polyester. These fibers therefore can also be used to form the conventionally used veil to keep the glass away from a finished surface of the pultruded product. The longitudinal and transverse layers are also preferably

interconnected by polyester stitches which are applied to the mat layers utilizing conventional stitching equipment that is generally available and has long been used in the textile industry.

A preferred mat in accordance with this invention has series of holes formed in the mat layers which extend through the thickness of the mat layers and receive binding resin therein that upon hardening, adds to the overall strength of the mat.

In accordance with the preferred method of preparing a mat for use as reinforcement of a resin composition to be used in forming an elongated pultruded part, a composite mat body is prepared which includes a layer of glass fiber rovings extending longitudinally of the mat body in the 0° direction and a thicker layer of transverse glass fiber rovings laying against the longitudinal fibers at a 90° angle with respect to the longitudinal fibers. Two mat layers are also incorporated in the mat body having oblique fibers which extend at an angle of about $\pm 45^\circ$ with respect to the longitudinal length of the elongated fibers. Thus, the fibers of the oblique fiber layers are positioned such that fibers of one layer are located at an oblique angle of about $+45^\circ$ with respect to the longitudinal length of elongated fibers. The fibers of the other oblique fiber layer are located at an -45° angle with respect to the longitudinal length of the elongated fibers in a direction opposite the angularity of the fibers of the first oblique fiber layer referred to above. Use of oblique fibers, one-half of which extend diagonally from one side of the mat to the other, while the other half extend diagonally to the other side of the mat, provide shear strength stiffness and anti-skewing resistance along both sides of the mat.

Desirably, a relatively thin polyester batting layer is brought into association with the longitudinally extending fibers, those at 90° with respect to the longitudinally extending fibers, and the oblique fibers. Hydro-entangling equipment, or a series of relatively closely-packed,

barbed penetration needles are employed, to deflect at least certain of the fibers of the batting layer into and through the other layers to interconnect the fibers of the various layers and increase the integrity of the layers of the mat in its final completed form.

5 Provision of the reinforcement fibers which extend transversely of the mat at substantially a 90° angle with respect to the pull direction of the mat enhances the reinforcing effect of such fibers in that there is little or no wasted forces in other directions.

The improved reinforcing mat for pultruded product has high strength to weight characteristics, is flexible for utilization in pultruded parts of complex and varied shape, is economical to manufacture, and can be used in standard pultrusion processes without
10 significant modification of those procedures. Furthermore, the mat can be fabricated as a unitary body of indefinite length which can be readily cut width-wise thereof to any desired width to fit a particular pultruded part.

Brief Description Of The Drawings

15 The invention will now be described in conjunction with the accompanying drawings in which:

Figure 1 is a schematic, cross-sectional view through a typical finished pultruded fenestration part;

Fig. 1A is an enlarged, fragmentary detail of a portion of the fenestration component
20 shown in Fig. 1 as outlined by the circular bullet;

Fig. 2 is a further enlarged, fragmentary, essentially schematic detail of a part of the fenestration component as shown in Figs. 1 and 1A;

Fig. 3 is a schematic flow diagram of a pultrusion process and the equipment employed for carrying out the present invention;

25 Fig. 4 is a schematic, greatly enlarged, fragmentary bottom view of a preferred embodiment of a mat prepared in accordance with this invention and useful for reinforcing the resin composition utilized to pultrude a product of the type illustrated in Fig. 1;

Fig. 5 is a fragmentary, cross-sectional view taken substantially along the line 5-5 of Fig. 4;

30 Fig. 6 is a schematic, greatly enlarged, fragmentary plan view of an alternative embodiment of a reinforcement mat in accordance with this invention;

Fig. 7 is a fragmentary, cross-sectional view taken substantially along the line 7-7 of Fig. 6;

Fig. 8 is a fragmentary, cross-sectional view taken substantially along the line 8-8 of Fig. 6;

Fig. 9 is a schematic representation of apparatus for fabricating a mat in accordance with this invention;

Fig. 10 is an enlarged, schematic depiction of a hydro-entangler identified as a water-jet and forming a part of the apparatus shown in Fig. 9;

Fig. 11 is a fragmentary, greatly enlarged, plan view of an alternative embodiment of a mat prepared in accordance with this invention and useful for reinforcing the resin composition utilized to pultrude a product of the type illustrated in Fig. 1;

Fig. 12 is a fragmentary, cross-sectional view along the line 12-12 of Fig. 11;

Fig. 13 is a fragmentary, cross-sectional view along the line 13-13 of Fig. 11;

Fig. 14 is a fragmentary, greatly enlarged, cross-sectional view of a further embodiment of a reinforcing mat in accordance with this invention;

Fig. 15 is a fragmentary, greatly enlarged, plan view of another embodiment of a reinforcing mat in accordance with this invention;

Fig. 16 is a fragmentary, cross-sectional view taken along the line 16-16 of Fig. 15.

Fig. 17 is an enlarged, fragmentary, schematic representation of needle apparatus as an alternative for forming a series of holes through the thickness of the mat; and

Fig. 18 is an enlarged, fragmentary view of a representative needle useful in the apparatus of Fig. 9.

In the drawings like characters of reference indicate corresponding parts in the different figures.

DETAILED DESCRIPTION

A typical fenestration product which for example may comprise a pultruded part 10 in the form of a window sash rail is shown Fig. 1. It can be seen from this figure that the cross-sectional shape of a part 10 of a fenestration product is of fairly complex configuration which typically has heretofore been difficult to fabricate on a uniform, cost-effective basis because of the inability to reinforce the pultrusion resin with an effective reinforcement material. Part

10 as shown comprises a hollow, closed, pultruded body 12 having uniformly spaced outer wall structure 14 and inner wall structure 16. As schematically shown in Fig. 2, wall structures 14 and 16 each include a reinforcement mat 18 on opposite sides of the central resin body 20 having longitudinally-extending glass reinforcing roving 22 therein. A mat is generally applied
 5 on the inside and the outside surfaces of a complex shape, as for example illustrated in Fig. 1. The mat applied to the inside and outside surfaces of the part offers a skin to the pultrusion. The skin serves to give the pultrusion wall transverse strength, by delivering transverse oriented glass rovings to the exterior of the laminate. Longitudinally extending rovings function to give the pultruded part longitudinal strength and modulus.

10 In most cases, it is necessary to provide symmetry of the mat layers to allow the assembly of fibers to pass through the die. One simple example of the shape is shown in Fig. 1 but it will be appreciated that the shape will vary in accordance with requirements and the shape shown is merely intended to be representative of shapes suitable for various end uses. Simple shapes such as rods in most cases do not need the transverse strength of the mat,
 15 whereas more complex shapes such as those used for fenestration profiles always use mat on the inside and outside. A relatively thin layer 24 of the resin making up body 20 covers the outer face of each of the reinforcement mats 18.

In Figs. 4 and 5, a preferred embodiment 18a of the mat 18 is schematically illustrated in plan view and cross-section, respectively. Mat 18a includes a series of separate,
 20 transversely-spaced, elongated rovings 28 defining a first layer 30 made up of a large number of relatively fine glass fibers extending longitudinally in the pull direction of mat 18a in what may be characterized as the 0° direction. These rovings should be in the range of 0° to about $+20^\circ$ and 0° to about -20° with respect to the longitudinal length of the mat, with it being understood that there should be a substantially equal number of rovings extending in opposite
 25 directions to provide for a balanced pull of a mat through a pultrusion die.

A second set of spaced glass fiber rovings 32 defining a transverse reinforcement second layer 34 extend at an angle of about 90° transversely of mat 18a with respect to the longitudinal axes of rovings 28 making up the first layer 30. The fibers are formed by rovings which extend continuously across the width of the mat 18a and are also preferably glass fibers.
 30 Thus, the fibers of the reinforcement second layer 34 are substantially wholly laid directly across the width of mat 18a and are defined by rovings laid side-by-side. The 90° orientation

of the fibers in transverse rovings 28 maximizes the transverse strength and increased modulus of the pultruded part 10, thus reducing the amount of fibers that must be provided transversely of the mat 18a. Rovings 32 are desirably positioned in substantially directly side-by-side, slightly spaced relationship to form a blanket of fibers without substantial breaks therebetween.

5 In lieu of the preferred 90° orientation of rovings 32, the rovings may be positioned at other angularities within the range of about 60° up to 90° in the plane of the mat.

Desirably, the individual rovings 32 are substantially larger in cross-sectional size than the cross-sectional dimension of each of the elongated rovings 28, as is evident from the schematic representations of Figs. 4 and 5. The transverse reinforcement fibers making up
10 rovings 32 constitute an amount in the range of about 50% to about 90% of the total fiber content in the mat 18a.

An angular transport roving layer 36 for assisting in the transfer of the reinforcement layer 34 is located adjacent layer 34 and comprises a plurality of spaced glass fiber rovings 38 located at an angle of about 45° with respect to rovings 28 of reinforcing layer 30. Again, the
15 rovings 38 are of substantially less cross-sectional thickness as compared with the cross-sectional thickness of transverse glass rovings 32.

Another angular transport roving layer 40 is located on the side of transport layer 36 away from transverse layer 34. The glass fiber rovings 42 are desirably at angle of 45° with respect to rovings 38, and therefore in this instance are oriented oppositely of the orientation
20 of rovings 38. Thus, the angularity of rovings 38 may be characterized as $+45^\circ$ while the angularity of rovings 42 may be characterized as -45° with respect to the longitudinal axes of rovings 28 of layer 30.

The rovings 38 of layer 36 and rovings 40 of layer 42, extending in opposite directions at 45° angles with respect to rovings 32 of layer 34 extend symmetrically across the width of
25 mat 18a between opposed edges 43 and 45 imparting preferred shear strength to the mat 18a. This increased shear strength is attributable to the fact that rovings 38 of layer 36 and rovings 42 of layer 40 transmit forces substantially equally in the opposite directions to the edge portions 43 and 45 of the mat. By providing such diagonally and oppositely oriented fibers at $+45^\circ$ and -45° , there is little tendency for one of the edge portions 43 or 45 to move in
30 advance of the other edge and thus generate a twisting or skewing action which could not be accommodated during pultrusion of part 10. Thus, the angular roving layers 34 and 36 present

a third layer of diagonal transport fibers for the transverse reinforcement fibers of layer 34 to provide shear strength stiffness and anti-skewing resistance to the mat. Again, the oblique or diagonal rovings 38 and 42 are continuous and straight across the width of the mat so as to maximize transmission of forces in respective diagonal directions. Alternatively, the oblique rovings 38 and 42 of angular layers 36 and 40 may be positioned in diagonal directions within the range of about $+30^\circ$ to about $+60^\circ$ and from about -30° to about -60° respectively. Here again, the amount of diagonal fibers extending in one or a plus direction should substantially equal the quantity of diagonal fibers extending in the opposite or minus direction, so that there is an anti-skewing and shear strength stiffness modulus jointly provided by the diagonally oriented fibers.

Layer 30, in conjunction with layers 36 and 40, gives the mat 18a dimensional stability in the 0° and 45° directions so that the mat 18a can be preformed to shape, yet offer sufficient tracking consistency and necking-resistance for consistent processing during pultrusion. An entanglement batting layer 44 (Fig. 5), and preferably comprising thermoplastic fibers such as polyester fibers, is shown as being located against the outer face of angular roving layer 40, although the batting layer 44 may if desired be placed against the outer face of the first layer 30 having longitudinally-extending glass rovings. The batting layer 44 has a series of relatively short fibers 46 randomly oriented in the batting and at least certain of which are intertwined or entangled throughout all three dimensions of the batting, as explained in detail hereinafter. A proportion of fibers 46a (not illustrated in Fig. 5) are deflected from the plane of batting 44 and extend as entanglement fibers through the layers 30, 34, 36 and 40, respectively, entangling and interconnecting glass fibers of glass rovings 28 of layer 36, rovings 32 of layer 34, rovings 38 of layer 36, and rovings 42 of layer 40.

The entangling fibers 46a which carry substantially through the thickness of mat 18a function to integrate the layered structure of the mat and prevent the layers from separating or moving relatively one with respect to another as the reinforcement mat is pulled through the pultrusion die, thus providing required temporary longitudinal, transverse and diagonal strength and twisting resistance during the pultrusion process.

All of the glass fiber layers (34° - 90° , 30° - 0° , and 36° , 40° , $+45^\circ$ and -45°) are preferably combined into a web by stitching with polyester thread 47 using a conventional multi-head stitching machine used in the textile industry. It can be seen in Figs. 4 and 5 that

the polyester stitches 47 pass through and interconnect all of the glass layers 30, 34, 36 and 40 of mat 18a. It is to be appreciated that the thread representations in Figs. 4 and 5 are schematic only, and that the heads of the stitchers are in relatively closely spaced relationship, causing the individual stretches of thread to also be in proximal relationship. By virtue of the flexibility of the individual stitches interconnecting layers 30, 34, 36 and 40, the mat component made up of the stitched glass layers also remains highly flexible, although interconnected in a stabilized manner by the polyester threads. Natural fiber thread, as for example cotton, may if desired, be used in place of the preferred polyester thread. In lieu of the provision of stitches 47, which are preferred, the layers 30, 34, 36 and 40, may be consolidated in a monolithic body by provision of a material such as a thermoplastic resin binder. The binding action of the binder can be supplemented, with a thermoplastic resin sheathing on certain or all of the glass fibers of the rovings 28, 32, 38 and 42, or such resin sheathing may if desired take the place of an added thermoplastic binder.

The batting layer 44 is hydro-entangled with the 0° roving layers, transverse roving layers, and angular roving layers of the mat 18a. Entanglement is preferably accomplished by subjecting the laminar structure made up of a batting layer, two angular roving transport layers, the transverse roving reinforcement layer, and the 0° pull direction layer of the pre-mat, to the action of water-jets from multiple banks of water nozzles. The individual water jets force certain of the polyester fibers 46 into locations extending throughout the mat 18a as shown in Fig. 5.

The individual jets of water wet the randomly-oriented fibers of the polyester batting web 44 directly to the glass web layers 30, 34, 36 and 40 and force certain of the polyester fibers 46 into locations 46a extending throughout the mat 18a. As shown for example in Fig. 5, the hydro-entangled fibers 46a act as between-glass bundle spanners, and within-glass bundle spanners, resulting in a somewhat flexible, and continuous mat product. It is also to be understood that the water jets from the hydro-entangler unit also break up some of the fibers of the layers 30, 34, 36 and 40 to produce shorten tangling glass fibers randomly oriented in the same manner as entangling fibers 46a and extending throughout the cross-sectional extent of layers 30, 34, 36 and 40. These broken glass entangling fibers cooperate with polyester fiber entangling fragments 46a to maintain the layers 30, 34, 36 and 40 in proper relative

relationship during processing of mat 18a and in the use thereof as a reinforcement for a pultruded part.

The mat product 18a is preferably calendered to reduce loft, needled to increase permeability, and padded with a PVA or similar binder material, to increase the dry-mat stiffness. The calendering, needling, and padding steps can be rearranged, processed multiple times, or omitted if the glass layers are thermally bonded with a resin as explained in detail hereinafter, depending on the desired permeability, stiffness, and thickness required for the mat, to optimize the pultrusion process, and the mechanical properties of the pultruded fenestration product, such as a window frame sill.

The fiberglass for the 90° glass fibers of roving 32 is preferably a 900 yield E-glass roving that has been treated with an organo-silane sizing composition to increase reinforcement-matrix interfacial strength. The +/- 45° oriented glass fibers 38 and 42 and the 0° direction glass fibers 28 are preferably G150's (15000 yards per pound) with a thermoplastic resin sheathing as recommended and supplied by Engineered Yarns Incorporated of Fall River, MA. The polyester material making up batting web 44 preferably consists of a blend a 60% Wellman 1.5 denier x 1.5" polyester staple fiber, and a 40% Kosa 1.5 denier by 1.5" long bicomponent fiber, crimped and baled. The Kosa fiber gives the batting web 44 a heat-fusible component, while the Wellman fiber enhances the consistency of the polyester batting and decreases shrink of the web during heat-fusing. After the blend is mixed, an opener filamentizes the fibers.

The fibers are then air laid as a batting web 44 via the Rando process onto the fiber glass substrate made up of layers 30, 34, 36 and 40. The batting web is hydro-entangled to the fiber glass substrate, dried, calendered to consolidate and reduce loft, needled to improve permeability, and then chemically treated via a padding operation where a PVAc coating is applied to the mat to improve handling properties.

The preferred material of batting 44 is a polymer such as randomly-oriented, cut-staple polyester fibers in which there are ends of the fibers extending across the width of the mat. The reduced thickness and the cut ends of the polyester mat allow the hydro-entangling jets to grasp the fibers and to carry parts of the fibers across from the plane of the mat into and through the fibrous glass layers to the underlying plate, thus effecting entangling of certain of the fibers of the batting mat with the underlying glass roving layers. The polyester fibers of the batting mat

may be grasped by the water-jets at the end of a fiber or at an intermediate location of the fiber. The fibers making up batting 44 should be of characteristics such that the fibers have a relatively low resistance to bending so that fibers may be moved downwardly through hydro-entanglement, or by mechanical structure such as barbed needles or the like. Glass fibers of reduced denier meeting the requisite flexibility requirements may be also used as a batting material for the hydro-entangling layer 44 of mat 18a.

The speed of the reinforcement mat 18a during manufacture of that mat is desirably about 15-25 ft. per minute. A preferred mat width is 20 in., but a wider mat can be fabricated using larger equipment. To create the mat 18a, glass roving supplied as a packaged spool is placed on a creel, and fed onto a set of parallel belts. The glass fibers of roving 32 are wound around needles along each edge of the endless belt, to arrange the glass fibers for the desired orientations. The fibers of longitudinal roving 32 and the fibers making up the roving of angular layers 36 and 40 preferably have been pre-coated with a thermoplastic synthetic resin comprising an amide, a polyester, or a similar sheath-like binder. When subjected to elevated temperature, the sheathing binder flows and thereby fuses the glass fibers of all of the glass layers of the mat 18a together, thereby producing a windable glass pre-mat. Preferred results have been obtained by using 11 courses per inch of roving 36, making up 90° reinforcement layer 34, about 8 courses per inch of 45° angular, diagonal fibers, and about 8 courses per inch of 0° fibers in an assembled pre-mat for mat 18a.

Meanwhile, the non-woven batting web 44 is made by blending of polyester staple fibers. The staple fibers are blended and opened in a Sigma Fiber Controls non-woven opener. The polyester fibers are then fed through a Rando webber so that a density of approximately 32 gram/square meter is reached. The Rando feed and doff speeds are set at about 2.5 and 1.0 respectively. The polyester non-woven web 44 is then combined with the glass pre-mat as described above.

The glass pre-mat with non-woven polyester web applied is fed into a hydro-entangler 66, as for example shown schematically in Fig. 10, on a fine-mesh belt to supplement jet reflections, to help to entangle the mat 18a. A suitable hydro-entangler is commercially available from ICBT Perfojet of Mont Bonnet, France. In general, the hydro-entangler 66 has upper manifold structure 68 receiving water from supply source 70 provided with a plurality of openings or nozzles 72 which direct water jets 74 directly onto mat 18a. The water-jets

delivered from nozzles 72 are preferably pulsed so that the jet streams exit through respective nozzles 72 and pass through the thickness of mat 18a until impacting the upper surface of a fine mesh belt 76. The water streams impacting against the upper surface of belt 76 cause the water to dissipate and thereby spread the fibers carried by the jet streams transversely across the top of the plate 76 to enhance entanglement of mat 18a.

The ICBT Perfojet hydro-entangler has three horizontally-spaced manifolds of the type shown schematically in Fig. 10, each having a row of water-jet nozzles 68, with the nozzles spaced at approximately eight per inch, providing a total of 100 to 150 nozzle openings. The water is jetted onto the mat 18a with the first manifold set at a water pressure of 500 psig, the second at 500 psig, and the third at 1200 psig. The mat 18a becomes entangled with fibers 48 as the water jets from manifold 66 pass through the layered material making up mat 18a. The mat 18a in web form is directed under a vacuum duct, drawing most of the water from the mat.

The hydro-entangler has the capability to blow-in holes or enhance existing holes in the mat, to achieve higher permeability. Permeability is useful to allow resin to flow through the thickness of the mat in the pultrusion die, to avoid harmful hydraulics or bubbling of the mat at the pultrusion die entrance. The hole size and distribution are enhanced by the needling operation or the hydro-entangling process. When enhanced by the hydro-entangling, the hole size and distribution are determined by the hydro-entangler back screen pattern and back screen mesh size. A mesh size of 40 x 40 wires/inch in the backside conveyor belt that transports the mat through the hydro-entangling process has been used to create a hole pattern in the mat of 40x40, to increase the permeability. A mesh of 10 x 10 is favored, however, because this coarse mesh allows for larger holes, corresponding to a higher and more desirable permeability. A permeability of 200-400 cubic feet per minute of air, through the mat (at a pressure differential of 0.5" of water) is sufficient for pultrusion, but a permeability of 600-800 or higher works very well for subsequent pultrusion processing.

The mat 18a then passes through a 15-foot diameter drum drying oven, such as one available from National Drying of Cary, NC, and that uses 200°F air forced through the thickness of the mat 18a to dry all of the layers thereof.

In lieu of using a hydro-entangler as described, a head (not illustrated) may be provided which supports a series of barbed needles 142 as shown in Fig. 18. In this case, the batting mat layer 44 should be opposite the points 142a of the needles so that when the barbed needle

penetrate the mat, the barbs 142b do not engage the fibers 46 of batting mat layer 44. However, upon retraction of the barbed needles 142, the barbs 142b thereon engage certain of the relatively short fibers 46 and pull all or at least a portion of such fibers upwardly into the glass roving layers to entangle the glass fibers with the polyester batting fibers 46.

5 The mat 18a is then calendered through smooth 12 in. diameter rolls on a B.F. Perkins calender set at 120°C with a minimum gap of 0.007 in., to reduce the mat thickness, and fuse the polyester material into the glass pre-mat. The calendered mat 18a is rolled, and allowed to cool to ambient temperature.

10 The entangled mat 18a is then unrolled and fed into a Dilo needler with a needle board using #16 needles spaced six-rows deep. The Dilo needler uses barbless needles to achieve a 10 x 10 holes-per-inch density. The punch depth is 14 mm, take off gear is set at 7, the base gear at 1.75, resulting in a stroke rate of 300 per minute, at a 1 meter/minute advance rate. During needling, the needles are heated to 160° F, by use of electric heat guns placed inside the Dilo needle box area, and blowing air through the length of the needle board.

15 The mat is next fed into an A. G. Mathis padder to apply a 2:5 solution of Franklin Duracet 600 PVAc, diluted with tap water. The mat picks up this binder, and is then squeezed through the rubber drying rolls set at 30 psi, at the given speed per the needling process. The mat passes through another identical National Drying of Cary, NC, 15-foot diameter drum drying oven that uses 200°F air forced through the thickness to dry the mat.

20 The mat is then slit longitudinally to the desired width for pultrusion, and fed into the pultrusion machine with resin-saturated glass rovings.

Equipment for pultruding a part 10 using a mat 18 as an outer skin reinforcement on one or both sides of the part is illustrated schematically in Fig. 3. Pulling mechanism 52, which for example may comprise roller structure, is operable to pull part 10 from a pultrusion die 54 of
25 the transverse configuration of the part to be produced.

As depicted schematically in Fig. 3, a mat 18' prepared in accordance with this invention as previously described may be directed from a source roll 116 over schematically illustrated roller 118 and 120, thence through resin bath 122, over roller 124 and into the pultrusion die 54. A web 126 of glass roving from source roll 128 passes over roller 130,
30 through resin bath 132, and then over rollers 134, 136 and 138 into the die 54. Mat 18a is supplied from source roll 140 and across rollers 118 and 120 into bath 122 and across roller 124

into die 54. A conventional pultrusion resin formulation may be used for pultruding part 10 with a typical formula which, for example, may include a mixture of thermoset polyester resin containing a reactive diluent such as styrene, along with a hardener, a catalyst, a calcium compound filler, a suitable surface modifier, and a die lubricant.

5 It is understood that the representation in Fig. 3 is schematic only and intended to indicate that mats 18' and 18" the longitudinally-extending rovings 126 are located such that mat 18' is one skin layer of the pultruded part, glass rovings 126 are centrally disposed of the part, and mat 18" is positioned as an opposite skin layer of the part. Furthermore, instead of passing the roving and the batting mat through respective resin baths, as shown schematically
10 in Fig. 3, resin may be applied to the roving and the batting using conventional resin-applying procedures that are well known to those skilled in this art.

An adhesive binding material such as PVA in a water carrier and containing about 20% to about 60% solids, corn starch or other adhesive material well known to one skilled in the art can be used to assist in interconnecting the structure so that the entangled fibers are bonded to
15 the fibers of the layers 30, 34, 36 and 40 and the fibers are bonded to each other. Generally, the binding agent is present in an amount in the range of 2% to 20% by weight (dry weight without water). However, the amount of binding agent is significantly reduced relative to conventional non-woven mats and thus the stiffness of the structure is very much reduced and therefore improved, allowing the reinforcement mat to bend to take up the complex shape of
20 the part to be formed while restricting shear.

If thermoplastic fibers are used for entangling, the binder can be reduced or even omitted and instead the fibers heated to provide some amount of heat bonding to each other and to the glass or main fibers. In the arrangement shown in Fig. 9, some of the entangling fibers are of a high melting point so that they remain intact and thus act as entangling fibers, and some
25 are of a lower melting point so that they act as bonding fibers.

The mat 18 as described provides reinforcement which has sufficient structural strength in the longitudinal and shear directions to ensure that it will be transported through the pultrusion die without significant longitudinal deformation. This is attributable to the fact that the main bulk of the fibers are arranged in the transverse direction to provide the finished
30 product with the required transverse strength. The number of fibers therefore necessary for a

predetermined transverse strength is significantly reduced since the bulk of the fibers are arranged in the direction to maximize the strength provided by each fiber.

Referring specifically to Fig. 9, apparatus 78 includes a conveyor belt 80 arranged to carry the components of the mat 18 from an initial supply to a wind-up device 82. The components of the mat 18 are laid onto the belt in required sequence from a supply thereof which includes a plurality of supply units generally indicated by the numeral 84.

Diagonal roving supply head 86 functions to lay down glass fiber rovings 42 at an angle with respect to the longitudinal length of belt 60 and preferably at an angle of about 45° . The head 86 traverses back and forth across belt 60 in timed relationship to the speed of the belt 60 to provide diagonally-oriented glass rovings. Glass fiber rovings supply head 88 is operable to reciprocate back and forth across the width of belt 60 to lay down transverse glass fiber rovings 32, again in timed relationship to movement of belt 60, to provide rovings which are at a 90° angle with respect to the path of travel of belt 60. Supply head 90 continuously lays down glass rovings 28 along the longitudinal length of belt 60, thus providing a 0° lay of rovings.

Diagonal roving supply head 92 lays down a glass fiber rovings 38 on the previously-applied rovings, at a 45° angle opposite the angularity of rovings 42. Thus, the rovings 38 may be characterized as $+45^\circ$ and the rovings 42 characterized as -45° with respect to the longitudinal length of the rovings laid down on belt 60 and thereby with respect to rovings 28.

The mat structure so formed is passed through a set of hot rolls 98 which act to elevate the temperature of the materials previously laid down on belt 60 so that when glass rovings are used that have a polymer sheath thereon as described above, the polymers decrease sufficiently in viscosity at the operating temperature of the apparatus 78 to flow through and assist in bonding of the layers of the mat one to another upon solidification in the final product. The rolls 98 act also to calender the mat so that it is compressed and slightly reduced in thickness. In some cases the heat may be omitted and simple calendering action be used.

When the glass fiber pre-mat so formed is consolidated by the bonding action, an air lay machine 100 receives cut-staple fibers of a suitable polymer such as polyester from a source thereof which may include a proportion of high melt fibers that withstand a temperature of about 350°F , and a remainder of low melt fibers which melt at about 270°F . These fibers are blended and laid by the air lay machine onto the top surface of the mat previously formed. The

details, construction and operation of equipment for air laying of staple fibers is well known to those skilled in the applicable art.

After the staple fibers are laid onto the mat, the collated structure is passed through the water-jet hydro-entangler 66 shown in Fig. 10 and described above. The belt 60 terminates
5 after the entangler and the collated and combined mat is laid onto a drum dryer 102 which extracts the water previously applied in the water-jet entangler as the mat structure passes around the periphery of the drum dryer.

Downstream of the dryer 102, the mat again passes between a pair of hot rolls 106 which act to further calender the mat and also to melt and activate the polyester fibers to
10 provide a bonding action. A needler or perforator 108 has a head 110 which supports a plurality of parallel, relatively closely-spaced needles 112 (Fig. 17) located downstream of the hot rolls 106. The head 110 is reciprocated to sequentially direct the needles 115 through the mat to form an array of perforations. The array includes perforations spaced both longitudinal and transversely so the series of needles across the width of the mat are punched through the
15 mat as the mat moves forwardly to provide the required number of spaced perforations thus increasing the porous nature of the mat to allow penetration of resin to bond through the mat into the various components of the mat. From 1 to 5000 holes per square inch may be formed in the mat using perforator 108, but about 80 holes per square inch formed by #14 needle size is preferred in a rectangular grid pattern. The needler 108 may be of conventional design which
20 functions at a rate of approximately 20 cycles or reciprocations per second. The holes may be round or polygonal and generally are of a diameter what may be characterized as pin holes. The hole pattern may be random, square, rectangular, close-packed-hexagonal, or similar configurations.

A PVA binder, or an equivalent powdered, solvent, thermal or aqueous based
25 thermoplastic binder is applied to the mat 18 by dispenser 113.

Following perforation of the mat and application of the binder, it is slit by slit 114 into a plurality of tapes or bands of the required width for use in the subsequent pultrusion process. Each band is then packaged in a suitable manner for example by winding onto a roll so the roll can be transferred to the supply section of the pultrusion process as described
30 hereinbefore.

The mat formation may also be carried out on-line with the pultrusion process so as to avoid the winding and supply steps although in general this is unlikely to be practical in many circumstances due to the different speeds of the processing lines.

The reinforcement mat 18a is made in multiple process steps, beginning with deposit
 5 of glass rovings 34, and angular layers 36 and 40 on a conventional needle support, which are thereafter laid on the longitudinal rovings 28 of layer 30, or, in the alternative, the longitudinal rovings may be laid down first followed sequentially by layers 34, 36 and 40. The layers 34, 36, and 40 may then be interconnected by stitching as with polyester threads 47. The batting layer 44 is then placed against the outermost face of the outer transport layer 40 forming a part
 10 of the stitched mat layers.

Rovings 32 of reinforcement layer 34 and made up of glass fiber bundles are festooned in the transverse direction (90° with respect to the pull direction of the part 10), generally 2-32 courses per inch to form a web (broadgood). Smaller reinforcement bundles of transport glass fibers 38 and 42 are laid in the $+45^\circ$ and -45° directions are placed sequentially on top of the
 15 transverse layers 34, as shown schematically in Fig. 5. These three layers are then positioned over the rovings 28 making up the 0° layer 30.

The batting 44 is preferably a relatively thin web of polyester staple fibers laid down by a conventional air machine. These polyester staple fibers are blended and carded, and a predetermined thickness is achieved by stacking of a plurality of staple-fiber webs. The
 20 polyester batting in the form of a web is laid on top of the angular layer 40, or in the alternative, over the 0° rovings 28, or as a further alternative, over both of the layers 36 and 40.

In the alternate embodiment of the invention as shown in Figs. 6, 7 and 8, the mat 18b has a 0° layer 30' made up of a series of longitudinally extending glass rovings 28' which is illustrated as being in direct overlying relationship to transverse layer 34' made up of a series
 25 of side-by-side glass rovings 32'. Angular fiber layers 36' and 40' made up of rovings 38' and 42', respectively, are located on opposite faces of the 0° roving layer 30' and transverse roving layer 34', respectively, as best shown in Figs. 6 and 7. A batting layers 44' of the same material as previously described, is illustrated as being positioned in overlying relationship to the outer face of angular roving layer 36'. Batting layer 44' is comprised of a series of relatively short
 30 fibers, such as polyester fibers 46', with the hydro-entangled fibers being designated by the numeral 46a.

The transverse speed at which supply heads 86 and 92 lay down the diagonally-oriented glass rovings 42 and 38 may be adjusted with respect to the velocity of belt 60 to vary the angularity of the transport glass rovings across the width of the mat on belt 60 from the preferred angularity of about $\pm 45^\circ$ to angles within the range of about $\pm 30^\circ$ to about $\pm 60^\circ$.

In an alternate embodiment of this invention, the diagonal glass rovings 38 and 42 may be replaced with additional quantities of the transverse glass rovings 32 making up reinforcement layer 34 so that the resultant strength of the fibers in the finished pultruded part lies primarily or generally in the transverse direction.

In another alternate embodiment of the pre-mat before the addition of the batting layer as depicted in Figs. 11-13, two longitudinally-extending glass fiber roving layers 144 and 146 are provided on opposite sides of centrally-located, substantially larger glass fiber rovings in transverse layer 148. Two oppositely-diagonal glass fiber roving layers 150 and 152 are positioned against the face of longitudinal layer 144 opposite transverse layer 148. The glass fiber roving layers 150 and 152 are preferably oriented in opposite diagonal directions at about 45° with respect to the longitudinal length of the mat.

Figure 14 illustrates another embodiment similar to the Fig. 13 embodiment except in this instance, a batting mat layer 154 is positioned on top of the diagonal glass fiber roving layer 150. In this figure, relatively short fibers of the batting mat layer are schematically shown as being entangled with the glass fiber layers 144-152, inclusive.

When diagonal glass rovings 38 and 42 are laid down at 70° angles with respect to the longitudinal length of the mat, as shown in Figs. 15 and 16, in many instances the longitudinal rovings 28 may be omitted in that the diagonal rovings provide adequate dimensional stability in the direction of pull to prevent canting, or distortion of the reinforcing mat 18b while passing through pultrusion die 52.

EXAMPLE 1-Thermally Bonded

The mat, in a resin matrix, provides the high transverse strength on the surface of the exterior or interior of a pultruded part such as a sash stile or rail, or a pultruded frame head, sill, or jamb, or other products outside the fenestration industry. The cross-section of the pultrusion profile consists of a matrix of thermosetting resin with longitudinal- and/or other-rovings in the

middle of the profile thickness, and the mat on the outside surfaces (interior surface in the case of a hollow profile). The mat portion of the laminate is about 0.010" thick, the longitudinal-roving area is about 0.030" thick, and the opposite mat is also about 0.010" thick. The longitudinal-roving-fibers are oriented in the 0° direction. These longitudinal-fibers are mostly
 5 675-yield (yards per pound) fiberglass rovings.

A construction of a reinforcement mat, with the longitudinal direction (e.g. the continuous direction) designated as the 0°-0° direction in the plane of the mat, comprised of:

a first layer of a plurality of 1800-yield fiberglass fibers rovings, substantially in the transverse, or 90° direction in the plane of the mat set at 10 courses per inch;

10 a second layer of a plurality of an amide, polyester or reactive sheathed fiber glass bundles spaced 4 per inch, in the +/- 45° direction in the plane of the mat, thermally bonded to the transverse fiberglass;

a third layer of a plurality of an amide, polyester or reactive sheathed fiber glass bundles spaced 4 per inch, in the 0° direction in the plane of the mat, thermally bonded to the transverse
 15 fiberglass;

a fourth layer of a plurality of polyester fibers that have at least portions thereof which extend in the thickness direction through the third, second and/or first layer to effect a connection there-between, with a pre-entangled weight of 32 grams per square meter;

with holes primarily between the transverse 1800-yield roving, like sieve-holes in the
 20 through-thickness direction, with the holes numbering eighty per square-inch in a rectangular grid pattern;

with a PVA-based binder to adhere the multiple layers and/or the interstices within a given layer;

with the entire mat thickness (slightly compressed during thickness measurement) at
 25 approximately 0.010-inches;

and a back-side with alternately-spaced 0° fibers as a third layer of a plurality of an amide, polyester or reactive sheathed fiber glass bundles spaced 4 per inch, in the 0° direction in the plane of the mat, thermally bonded to the transverse fiberglass.

EXAMPLE 2--Polyester Stitched

The mat, in a resin matrix, provides the high transverse strength on the surface of the exterior or interior of a pultruded sash stile or rail, or a pultruded frame head, sill, or jamb. The cross-section of the pultrusion profile consists of a matrix of thermosetting resin with longitudinal- and/or other-roving in the middle of the profile thickness, and the mat on the outside surfaces (interior surface in the case of a hollow profile). The mat portion of the laminate is about 0.010" thick, the longitudinal-roving area is about 0.030" thick, and the opposite mat is also about 0.010" thick. The longitudinal-roving-fibers are oriented in the 0° direction. These longitudinal-fibers are mostly 675-yield (yards per pound) fiberglass rovings.

A construction of a reinforcement mat, with the longitudinal direction (e.g. the continuous direction) designated as the 0° direction in the plane of the mat, comprised of:

a first layer of a plurality of 1800-yield fiberglass fibers rovings, substantially in the transverse, or 90° direction in the plane of the mat set at 10 courses per inch;

a second layer of a plurality of 6-denier polyester thread spaced 6 per inch, in the +45° direction in the plane of the mat, stitched to the transverse fiberglass;

a third layer of a plurality of a 6-denier polyester thread spaced 6 per inch, in the 0° direction in the plane of the mat, stitched to the transverse fiberglass;

a fourth layer of a plurality of 6-denier fibers that have at least portions thereof which extend in the thickness direction through the third, second and/or first layer to effect a connection there-between, with a pre-entangled weight of 32 grams per square meter;

with holes primarily between the transverse 1800-yield roving, like sieve-holes in the through-thickness direction, with the holes numbering eighty per square-inch in a rectangular grid pattern;

with a PVA-based binder to adhere the multiple layers and/or the interstices within a given layer;

with the entire mat thickness (slightly compressed during thickness measurement) at approximately 0.010-inches;

and a back-side with alternately-spaced 0° fibers as a third layer of a plurality of a 6-denier polyester thread spaced 6 per inch, in the 0° direction in the plane of the mat, and stitched to the transverse fiberglass.

EXAMPLE 3--Fiberglass Stitched

The mat, in a resin matrix, provides the high transverse strength on the surface of the exterior or interior of a pultruded sash stile or rail, or a pultruded frame head, sill, or jamb. The cross-section of the pultrusion profile consists of a matrix of thermosetting resin with longitudinal- and/or other-roving in the middle of the profile thickness, and the mat on the outside surfaces (interior surface in the case of a hollow profile). The mat portion of the laminate is about 0.010" thick, the longitudinal-roving area is about 0.030" thick, and the opposite mat is also about 0.010" thick. The longitudinal-roving-fibers are oriented in the 0° direction. These longitudinal-fibers are mostly 675-yield (yards per pound) fiberglass rovings.

A construction of a reinforcement mat, with the longitudinal direction (e.g. the continuous direction) designated as the 0° direction in the plane of the mat, comprised of:

a first layer of a plurality of 1800-yield fiberglass fibers rovings, substantially in the transverse, or 90° direction in the plane of the mat set at 10 courses per inch;

a second layer of a plurality of fiberglass fiber bundles spaced 4 per inch, in the +45° direction in the plane of the mat, stitched to the transverse fiberglass;

a third layer of a plurality of a 6-denier polyester thread spaced 4 per inch, in the 0° direction in the plane of the mat, stitched to the transverse fiberglass;

a fourth layer of a plurality of polyester fibers that have at least portions thereof which extend in the thickness direction through the third, second and/or first layer to effect a connection there-between, with a pre-entangled weight of 32 grams per square meter;

with holes primarily between the transverse 1800-yield roving, like sieve-holes in the through-thickness direction, with the holes numbering eighty per square-inch in a rectangular grid pattern;

with a PVA-based binder to adhere the multiple layers and/or the interstices within a given layer;

with the entire mat thickness (slightly compressed during thickness measurement) at approximately 0.010-inches;

and a back-side with alternately-spaced 0° fibers as a third layer of a plurality of a fiberglass bundles spaced 4 per inch, in the 0° direction in the plane of the mat, and stitched to the transverse fiberglass.

Since various modifications can be made in our invention as herein above described, and many apparently widely different embodiments of same made within the spirit and scope of the claims without departing from such spirit and scope, it is intended that all matter contained in the accompanying specification shall be interpreted as illustrative only and not in
5 a limiting sense.

10

15

20

25

30

WE CLAIM:

1. A pultruded part of constant transverse, predetermined cross-sectional shape and formed by a pultrusion die comprising:

5 a stretch of elongated fiber rovings;

an elongated reinforcement mat associated with the stretch of fiber rovings, said reinforcement mat including

a first layer of generally longitudinally-extending fibers which provide longitudinal strength to the mat;

10 a second layer of generally transverse reinforcement fibers in association with the first layer of generally longitudinal fibers and oriented in a direction at an angle with respect to the longitudinal pull direction of the mat to provide transverse strength to the mat;

15 a third layer of diagonal transport fibers for the transverse reinforcement fibers, said transport fibers extending diagonally of the first layer of generally longitudinally-extending fibers in directions to provide shear strength stiffness and anti-skewing resistance to the mat;

20 a batting layer containing fibers, at least a portion of which extend through the thickness of the mat layers and interconnect the fibers of the layers to increase the shape-retaining capability of the mat during pultrusion of the part; and

a synthetic resin composition enveloping said mat and the elongated fiber rovings and configured to present said predetermined desired cross-sectional shape of the part.

25 2. A pultruded part as set forth in claim 1 wherein at least a portion of the fibers of the batting layer which extend through and interconnect the mat layers are entangling fibers.

30 3. A pultruded part as set forth in claim 2 wherein the entangling fibers have a bending resistance less than that of the fibers of the first and second layers.

4. A pultruded part as set forth in claim 2 wherein the entangling fibers include a certain proportion of fibers having a lower melting temperature than a remaining proportion of entangling fibers, said low-melt fibers being bonded to the fibers of the first and second layers.

5

5. A pultruded part as set forth in claim 1 wherein the generally transverse fibers of the reinforcement layer are disposed at an angle of about 60° to about 90° with respect to the longitudinal length of the fibers of said first layer.

10

6. A pultruded part as set forth in claim 1 wherein the generally transverse fibers of the reinforcement layer are disposed at an angle of about 90° with respect to the longitudinal length of the fibers of said first layer.

15

7. A pultruded part as set forth in claim 1 wherein the fibers of said third transport layer are disposed at an angle in the range of about $+30^\circ$ to about $+60^\circ$ and from about -30° to about -60° with respect to the longitudinal length of the fibers of the first layer.

20

8. A pultruded part as set forth in claim 1 wherein is provided a third layer of fibers for transporting the transverse fibers of the second layer, said third layer being provided with first transport fibers disposed at an angle of about $+45^\circ$ and second transport fibers are disposed at an opposite angle of about -45° with respect to the longitudinal length of the fibers of the first layer.

25

9. A pultruded part as set forth in claim 1 wherein is provided a network of flexible stitching joining and interconnecting at least certain layers of the mat.

10. A pultruded part as set forth in claim 1 wherein is provided a series of individual, spaced, generally tubular areas extending through the layers of the mat, said areas being filled with a resin which thereby increases the reinforcement properties of the mat.

30

11. A pultruded part as set forth in claim 1 wherein said part is a fenestration component selected from the group of window jambs, sills, heads, sash stiles and sash rails.

12. A pultruded part as set forth in claim 11 wherein said mat is adjacent the
5 normally outermost surface of said component.

13. A mat for use as reinforcement for a resin composition to be used in forming an elongated, pultruded part of constant transverse cross-section using a pultrusion die, said mat comprising:

10 a first layer of continuous, generally longitudinally-extending fibers which provide longitudinal strength to the mat;
a second layer of generally transverse reinforcement fibers in association with the first layer of generally longitudinal fibers and oriented in a direction at an angle with respect to the longitudinal pull direction of the mat to provide transverse
15 strength to the mat;
a third layer of diagonal transport fibers for the transverse reinforcement fibers, at least certain of the transport fibers extending diagonally of the first layer of generally longitudinally-extending fibers and oriented to provide shear strength stiffness and anti-skewing resistance to the mat; and
20 a batting layer containing fibers, at least a portion of which extend through the thickness of the mat layers and interconnect the fibers of all of the layers to increase the shape-retaining capability of the mat during pultrusion of the part.

14. The mat of claim 13 wherein said batting layer is bonded to the other layers of
25 the mat forming a monolithic body.

15. The mat of claim 13 wherein is provided a binding agent which bonds the mat layers into a monolithic body.

16. The mat of claim 13 wherein at least a portion of the batting layer fibers extend through the thickness of the mat layers and which extend through and interconnect the mat layers, are entangling fibers.

5 17. The mat of claim 16 wherein the entangling fibers are formed of a cut-staple material.

18. The mat of claim 16 wherein the fibers of the first layer are formed of glass and the entangling fibers are of a synthetic resin polymer.

10 19. The mat of claim 16 wherein at least certain of the entangling fibers are heat bonded to the fibers of the other layers of the mat.

15 20. The mat of claim 13 wherein a first portion of the transport layer fibers extend diagonally from one side of the mat to the other side and a second portion of the transport layer fibers extend diagonally from said other side to said one side.

20 21. The mat of claim 20 wherein the angle of the fibers of the first and second portions of the transport layer with respect to the longitudinally-extending fibers of the first layer is essentially the same.

22. The mat of claim 21 wherein the fibers of each of the first and second portions lie along respective straight lines at a common angle with respect to the line of the pull of the mat.

25 23. The mat of claim 13 wherein the fibers of said third transport layer are disposed at an angle in the range of about + 30° to about + 60° and from about - 30° to about - 60° with respect to the longitudinal length of the fibers of the first layer.

24. The mat of claim 23 wherein the transport layer of fibers extend at opposite angles of about $+45^\circ$ and about -45° with respect to the longitudinally-extending fibers of the first layer.

5 25. The mat of claim 13 wherein the transverse reinforcement mat fibers are oriented in a direction at an angle of from about 60° to about 90° with respect to the longitudinally-extending fibers of the first layers.

10 26. The mat of claim 25 wherein the transverse reinforcement mat fibers are oriented in a direction at an angle of about 90° with respect to the longitudinally-extending fibers of the first layers.

15 27. A mat for use as reinforcement for a resin composition to be used in forming an elongated, pultruded part of constant transverse cross-section using a pultrusion die, said mat comprising:

a first layer of continuous, generally longitudinally-extending fibers which provide longitudinal strength to the mat;

20 a second layer of generally transverse reinforcement fibers in association with the first layer of generally longitudinal fibers and oriented in a direction at an angle with respect to the longitudinal pull direction of the mat to provide transverse strength to the mat; and

25 a batting layer containing fibers, at least a portion of which extend through the thickness of the mat layers and interconnect the fibers of all of the layers to increase the shape-retaining capability of the mat during pultrusion of the part, the batting layer being bonded to the other layers of the mat.

28. The mat of claim 27 wherein the generally longitudinally-extending fibers of the first layer includes fibers which extend at an angle of from about 0° to about $+20^\circ$ and from about 0° to about -20° relative to the direction of the pull of the mat.

29. A method of preparing a mat for use as reinforcement for a resin composition to be used in forming an elongated, pultruded part of constant transverse cross-section using a pultrusion die, said method comprising:

providing a first layer of generally longitudinally-extending fibers which provide longitudinal strength to the mat;

providing a second layer of generally transverse reinforcement fibers in association with the first layer of generally longitudinal fibers and oriented in a direction at an angle with respect to the longitudinal pull direction of the mat to provide transverse strength to the mat;

providing a third layer of transport fibers for the transverse reinforcement fibers, at least certain of the transport fibers extending diagonally of the first layer of generally longitudinally-extending fibers and oriented to provide shear strength and anti-skewing resistance to the mat;

providing a batting layer containing plurality of fibers; and

directing at least a portion of the batting layer fibers through the thickness of the layers to interconnect the fibers of the layers to increase the shape-retaining capability of the mat during pultrusion of a part.

30. The method of claim 29 wherein is included the step of providing a second layer of generally transverse reinforcement fibers in which the transverse fibers are oriented at an angle of from about $\pm 60^\circ$ to about 90° .

31. The method of claim 29 wherein is included the step of providing a third layer of transport fibers in which there are transport fibers at an angle of from about $+30^\circ$ to about $+60^\circ$ and from about -30° to about -60° .

32. The method of claim 29 wherein is included the step of providing a third layer of transport fibers in which there are transport fibers at an angle of about $+45^\circ$ and about -45° .

33. The method of claim 29 wherein the fibers, at least a portion of which extend through the thickness of the mat layers and extend through and interconnect the mat layers, are entangling fibers, and including the step of providing entangling fibers, at least certain of which have a lower melting temperature than other entangling fibers such that the lower melting fibers are bonded to the pull layer fibers and the angular mat fibers of the reinforcement layer during pulling of the pultruded part through the pultrusion die.

34. The method of claim 29 wherein is included the step of providing entangling fibers which extend through the thickness of the mat layers.

35. The method of claim 34 wherein said step of providing entangling fibers includes providing B-stage thermoset or thermoplastic fibers.

36. The method of claim 34 wherein said entangling fibers are a polyester terephthalate.

37. The method of claim 29 which includes applying forces to the mat layers which deflect at least certain of the fibers of said reinforcement layer to provide said entangling fibers.

38. The method of claim 37 which includes applying forces generally normal to the reinforcement layer for deflecting fibers thereof to produce said entangling fibers.

39. The method of claim 37 which includes applying water-jets in a direction generally normal to the reinforcement layer to produce said entangling fibers.

40. The method of claim 37 which includes subjecting the fibers of the reinforcement layer to hydraulic forces from a hydro-entangler to produce said entangling fibers.

41. The method of claim 40 which includes subjecting the fibers of the reinforcement layer to hydraulic forces within the range of about 600 psi to about 1200 psi to produce said entangling fibers.

5 42. The method of claim 29 wherein is included the steps of heat binding the fibers of the layers of the mat to one another.

43. The method of claim 29 which includes providing a first portion of transport fibers which extend diagonally from one side of the mat to the other side and a second portion
10 of reinforcement fibers which extend diagonally from said other side to said one side.

44. The method of claim 43 wherein the angle of the first and second portions of the reinforcement fibers is essentially the same.

15 45. The method of claim 29 which includes the steps of providing glass longitudinally-extending fibers in said first layer and synthetic resin fibers in said second layer.

46. The method of claim 29 wherein is included the step of providing random-oriented fibers presenting a flexible, relatively thin batting layer.

20 47. The method of claim 29 wherein is provided stitching for interconnecting the mat layers.

48. The method of claim 47 wherein said stitching comprises a polyester thread.

25 49. The method of claim 29 wherein is included the step of providing a synthetic resin coating on at least certain of the fibers of the reinforcement layer.

30 50. The method of claim 49 wherein said synthetic resin coating is a resin selected from the group consisting of amid and polyester resins capable of softening and bonding the mat layers.

51. The method of claim 29 wherein is included the step of providing an array of spaced holes extending through at least certain of the layers of the mat.

52. The method of claim 51 wherein said holes number from 1 to 5,000 per square
5 inch.

53. The method of claim 51 wherein said holes are selected from the group of round, polygonal or pin holes.

54. The method of claim 53 wherein said holes are arranged in pattern orientations selected from the group of relatively close-packed random, circular, square, rectangular, or hexagonal.
10

55. The method of claim 29 wherein is included the step of providing a batting layer
15 in which the fibers thereof comprise polyester fibers.

56. The method of claim 29 wherein is included the step of providing a quantity of synthetic resin in association with at least certain of the fibers of the layers of the mat and comprising a polyvinyl acetate-based binder.
20

57. The method of claim 56 wherein is included the step of thermally bonding the layers of said mat together by use of said quantity of said synthetic resin associated with at least certain of the fibers.

58. The method of claim 57 wherein said quantity of synthetic resin in association with at least certain of the fibers is selected from the group consisting of a powder, solvent, thermal or aqueous-based thermoplastic binder.
25

59. The method of claim 29 where the entire mat thickness is no more than about
30 .020 in.

60. The method of claim 29 wherein is included the steps of folding the edges of the mat over to form a hem defining added longitudinal fibers to reinforce the edges of the mat.

61. The method of claim 29 wherein is included the step of providing entangling
5 fibers having a bending resistance less than that of the fibers of the first and second layers.

62. A method of preparing a mat for use as reinforcement for a resin composition to be used in forming an elongated, pultruded part of constant transverse cross-section using a pultrusion die, said method comprising:

10 providing first and second mat layers of fibers, said layers being arranged in opposite, substantially equal angular directions greater than 0° and no more than $+20^\circ$ and -20° less with respect to the pull direction of the mat during pultrusion of the part in disposition to provide longitudinal strength;

15 providing a third layer of generally transverse reinforcement fibers in association with the first and second mat layers, the fibers of said third layer being oriented in a direction at an angle with respect to the longitudinal pull direction of the mat to provide transverse strength to the mat; and

20 providing a batting layer containing fibers at least a portion of which comprise entangling fibers extend through the thickness of the mat layers and interconnect the fibers of the layers.

63. The method of claim 62 wherein the fibers of said first and second mat layers each lie in essentially a straight line at a common angle respectively relative to the line of pull.

25 64. The method of claim 62 wherein is provided a binder bonding the layers of the mat together.

ABSTRACT

A method of pultrusion includes collating an assembly of substantially longitudinally continuous fibrous elements and a resin, pulling the elements and the resin through a die to shape the elements and to effect setting of the resin, where one of the elements is a mat specially designed to transport primarily transverse fibers into the part. The mat has a first layer containing a plurality of glass fibers which extend substantially transversely of the mat so as to be arranged in the part to provide strength to the part primarily in the transverse direction. The first layer is carried in the pultrusion process by a second layer containing a plurality of glass or polymer fibers arranged to provide shear strength to the mat. The second layer contains diagonal fibers and longitudinal fibers which may be bonded to or stitched to the first layer. The first and second layers are integrated by entangling fibers of polyester by a hydro-entangling process. A binder of PVA may be added. The mat is perforated by an array of holes to enhance resin uptake.

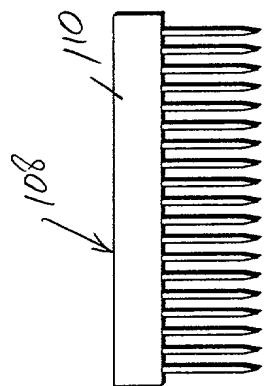


FIG. 17.

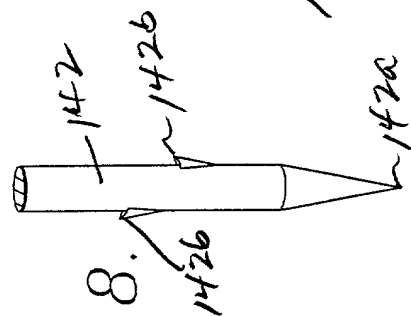


FIG. 18.

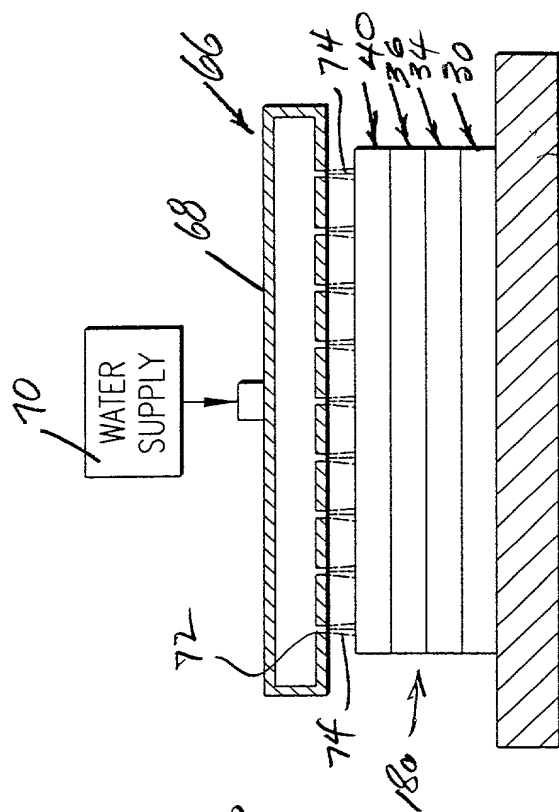


FIG. 10.

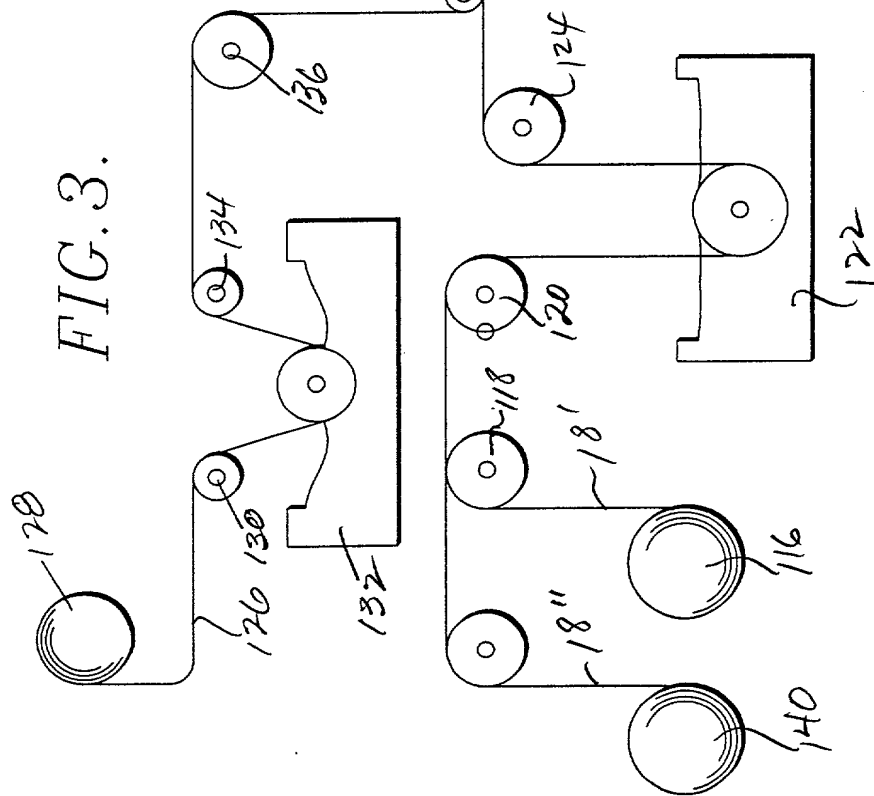


FIG. 3.

+

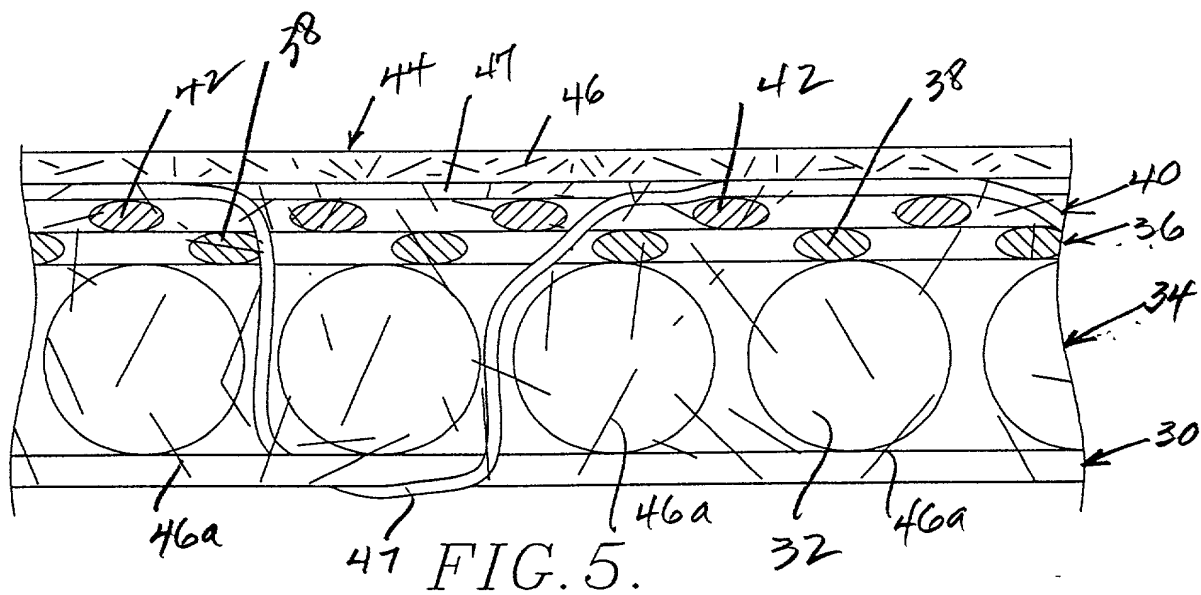
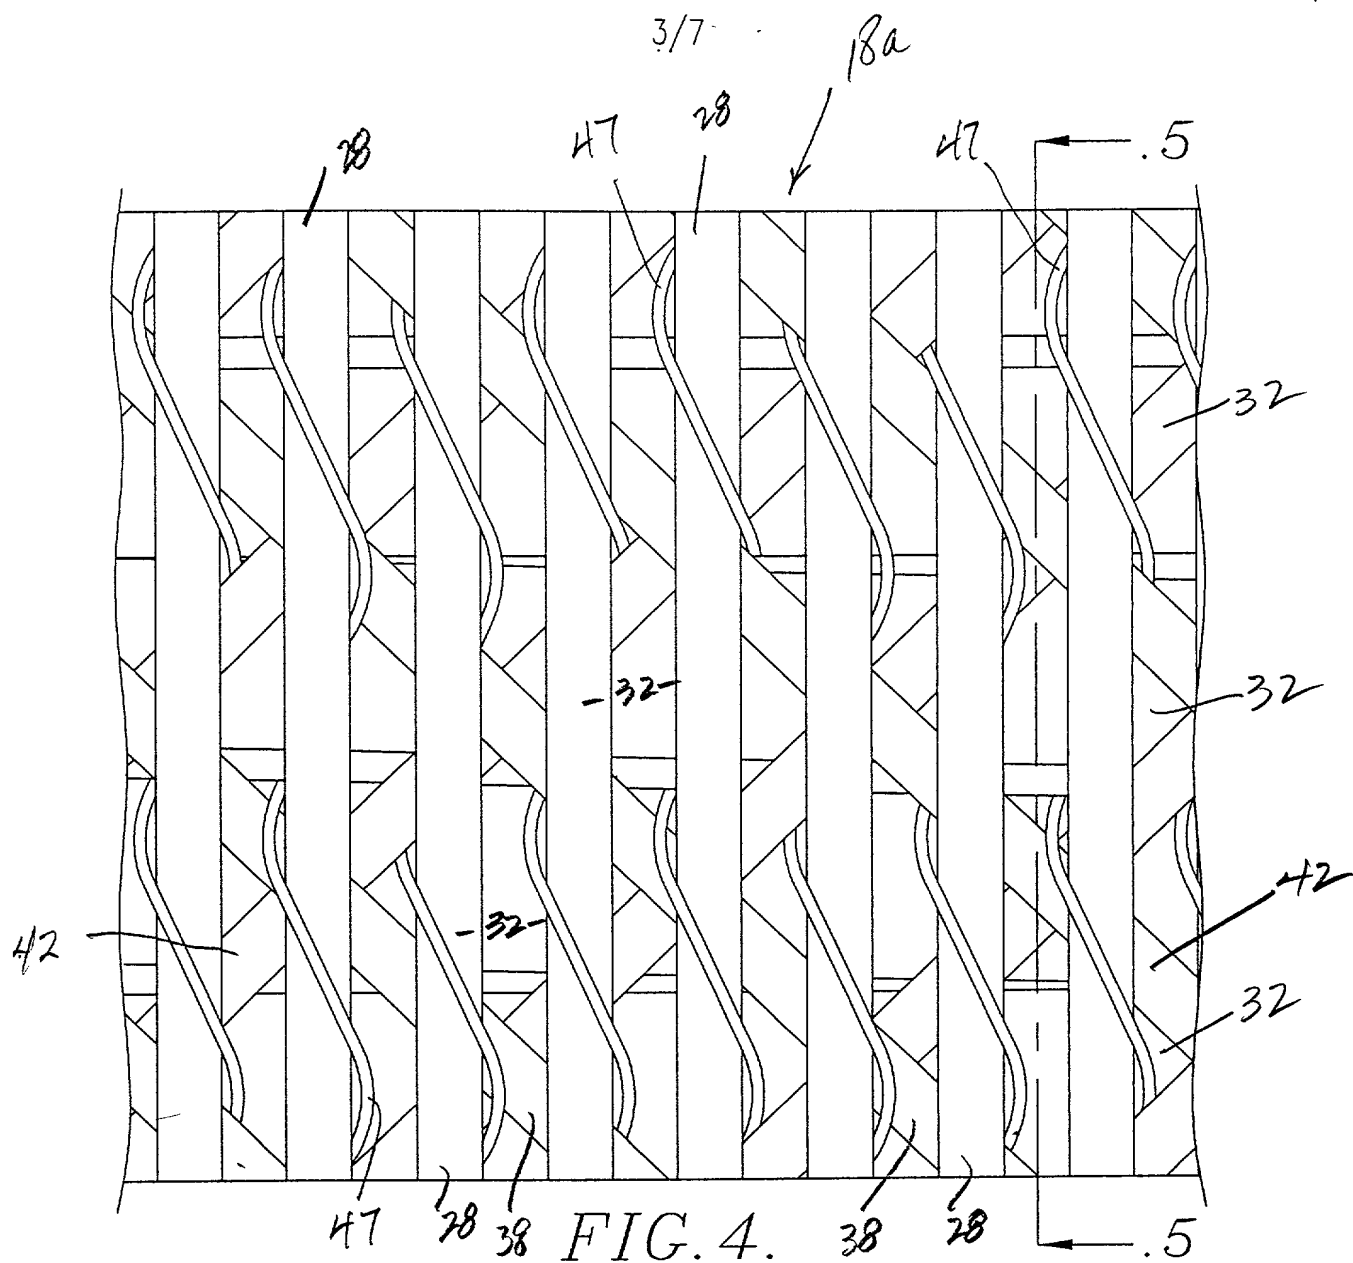
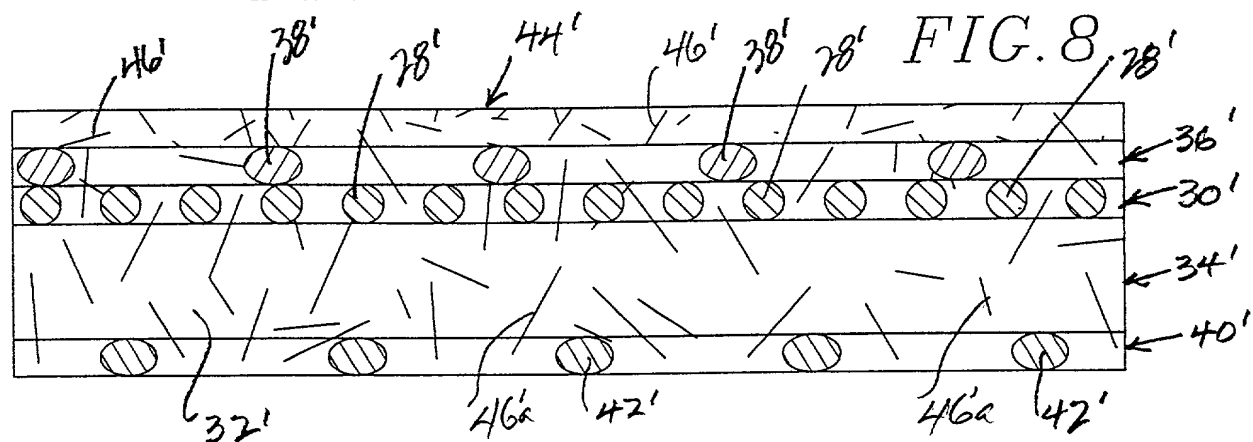
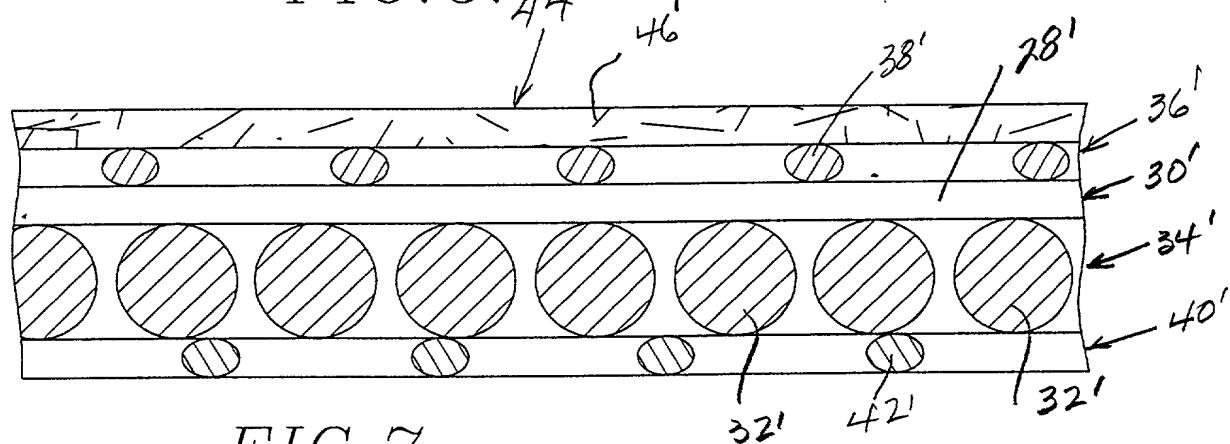
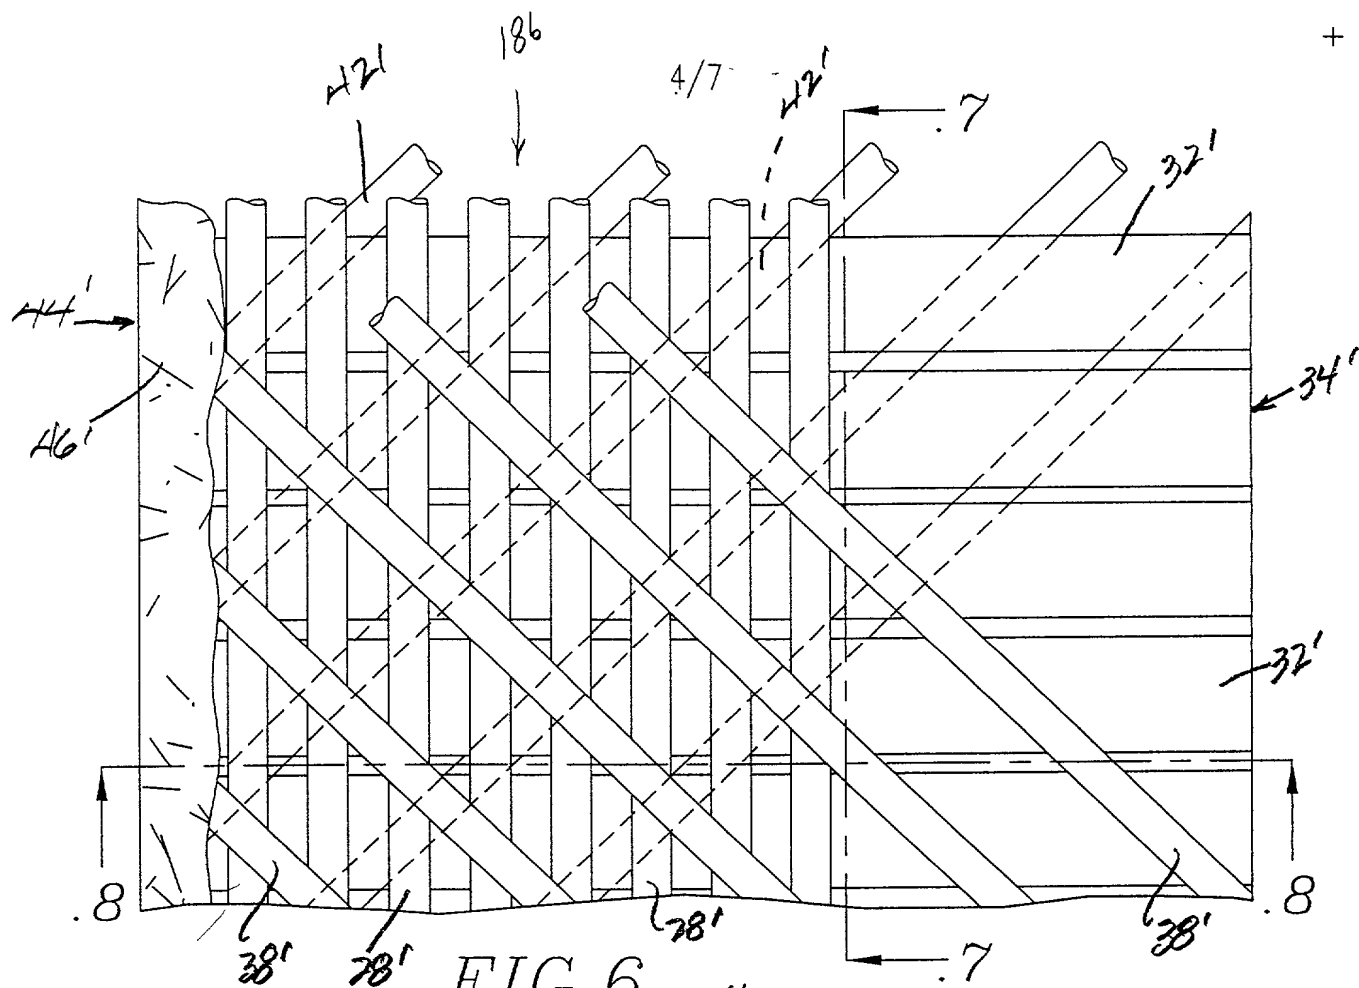
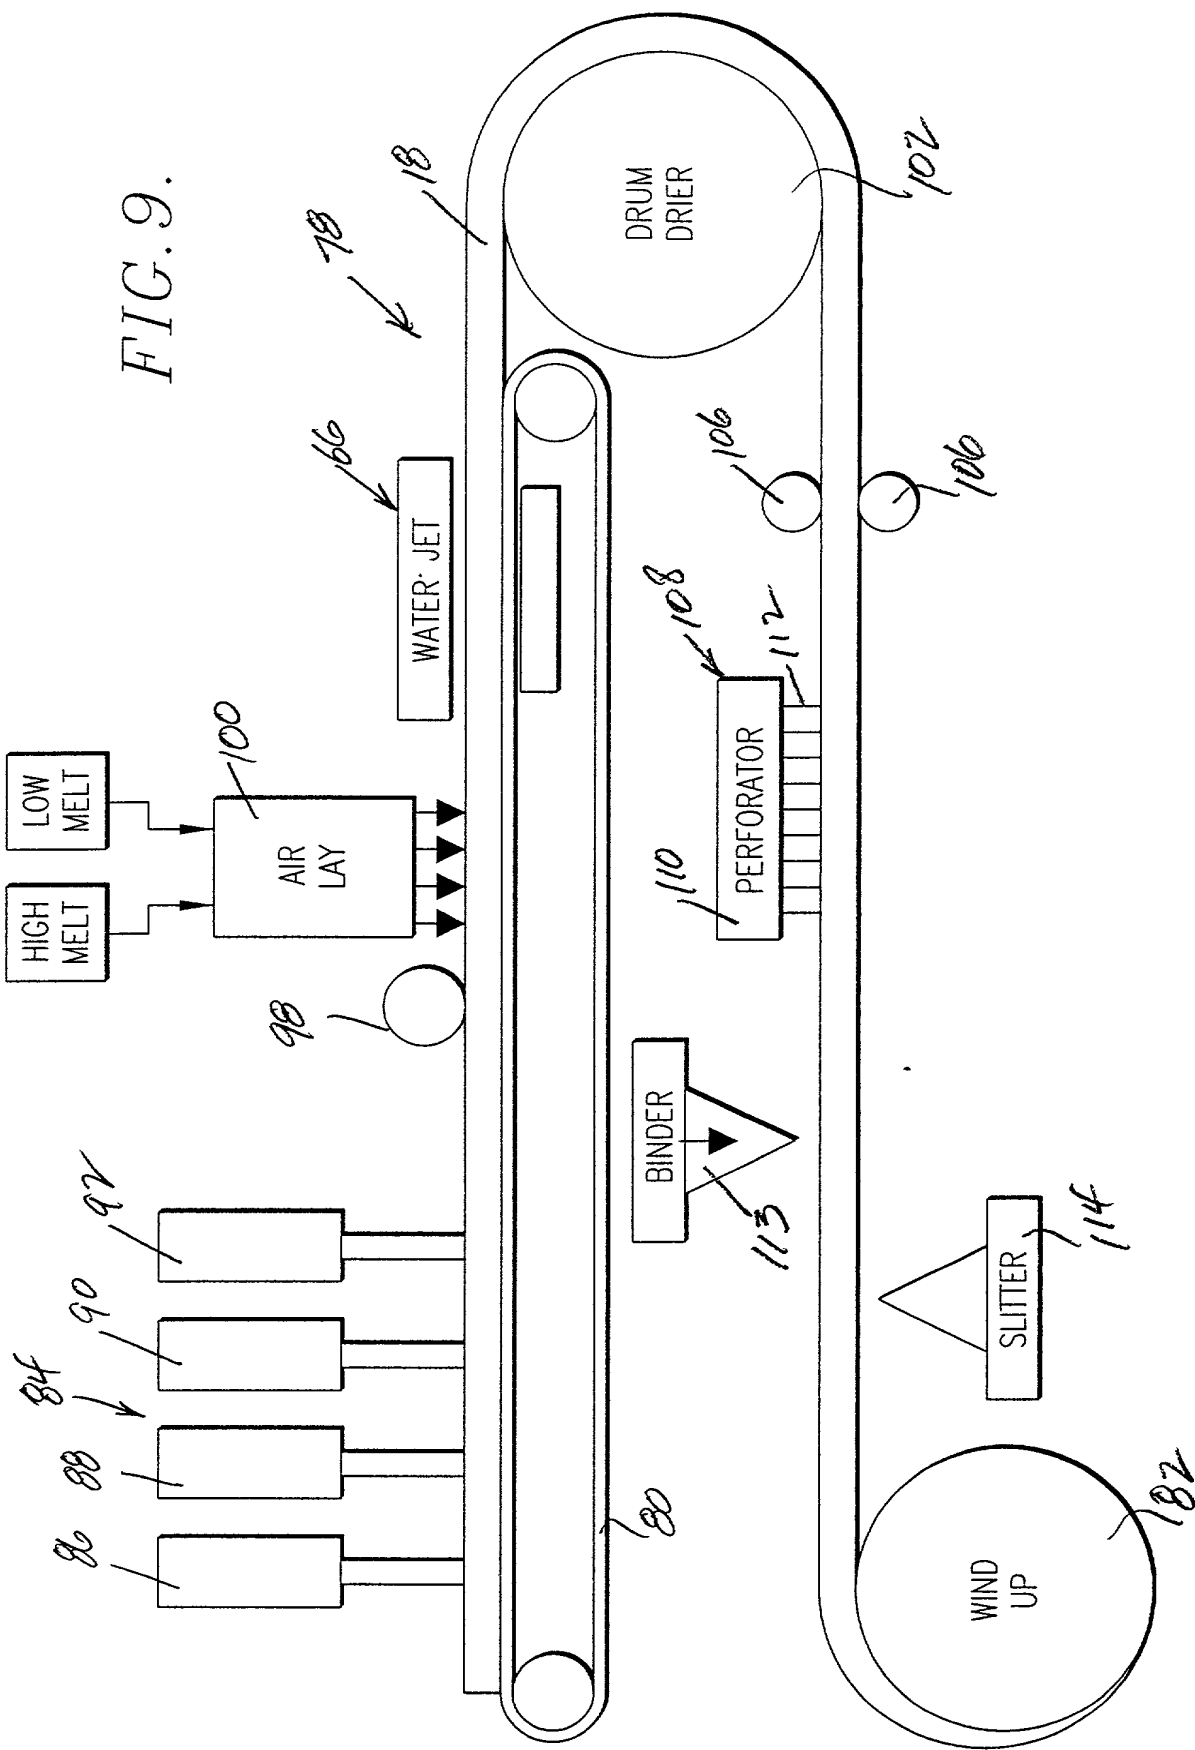


FIG. 5.





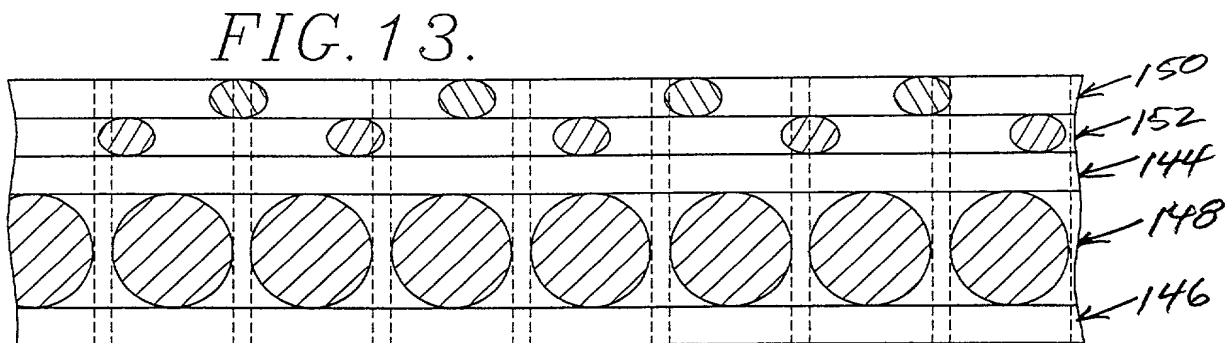
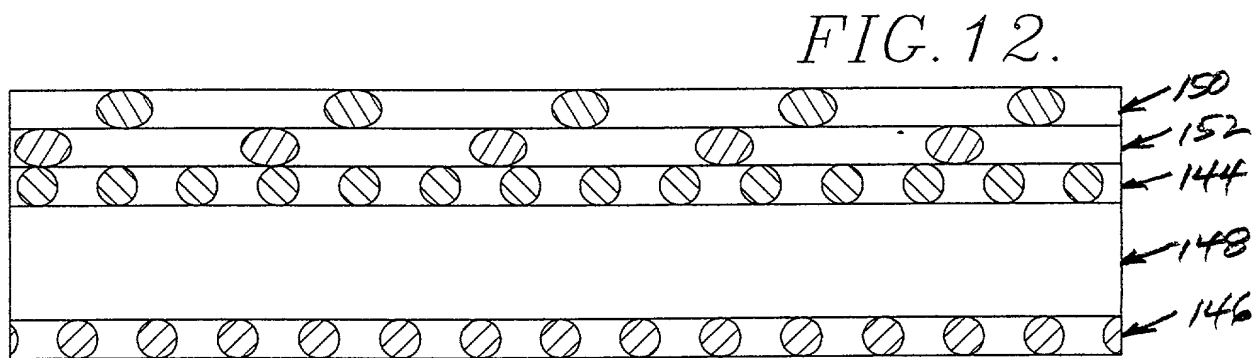
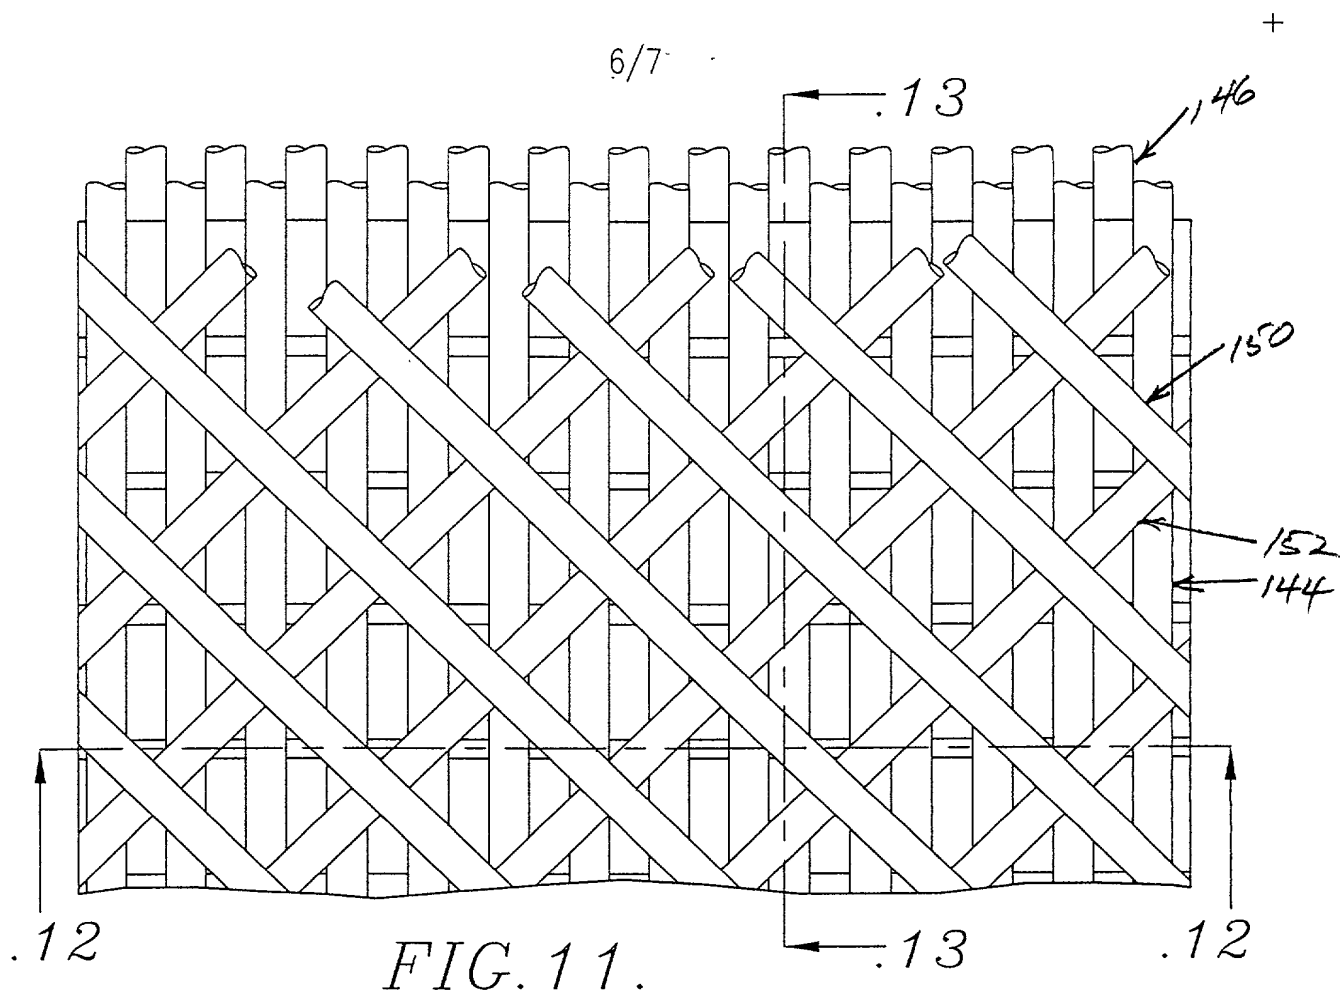


FIG. 14.



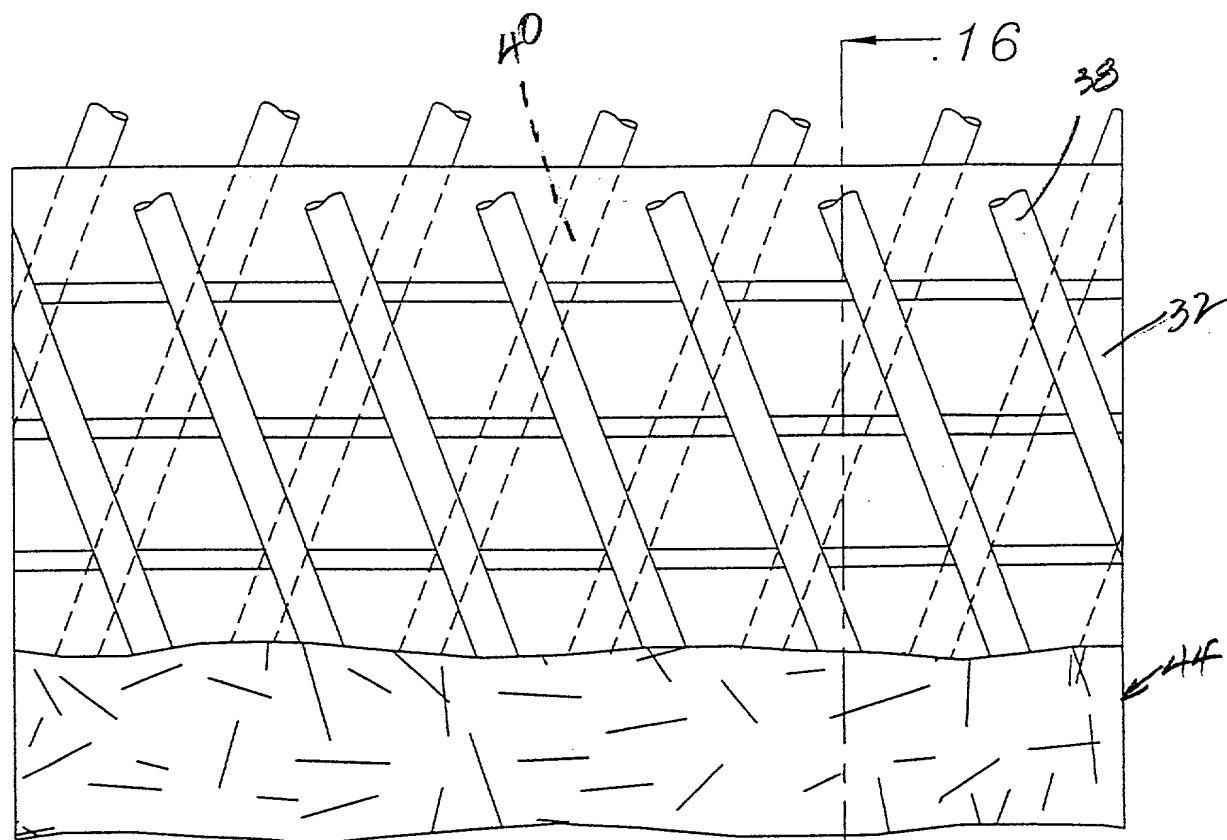


FIG. 15.

FIG. 16.

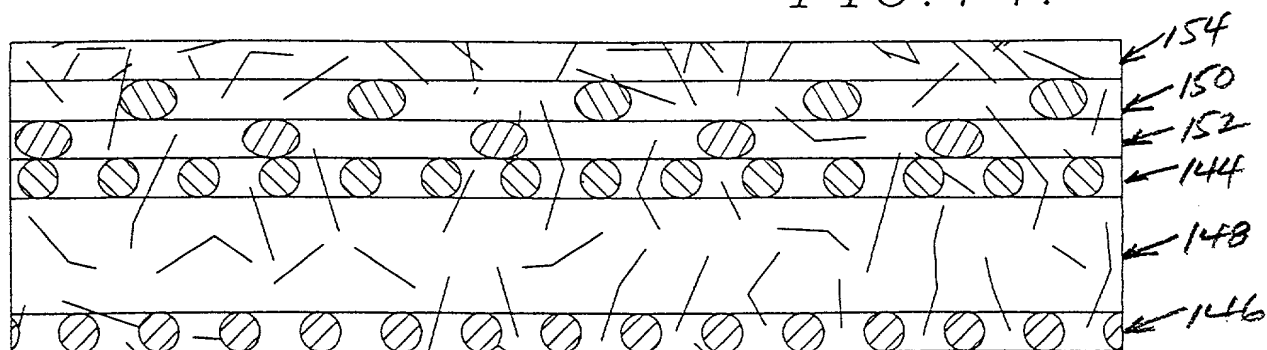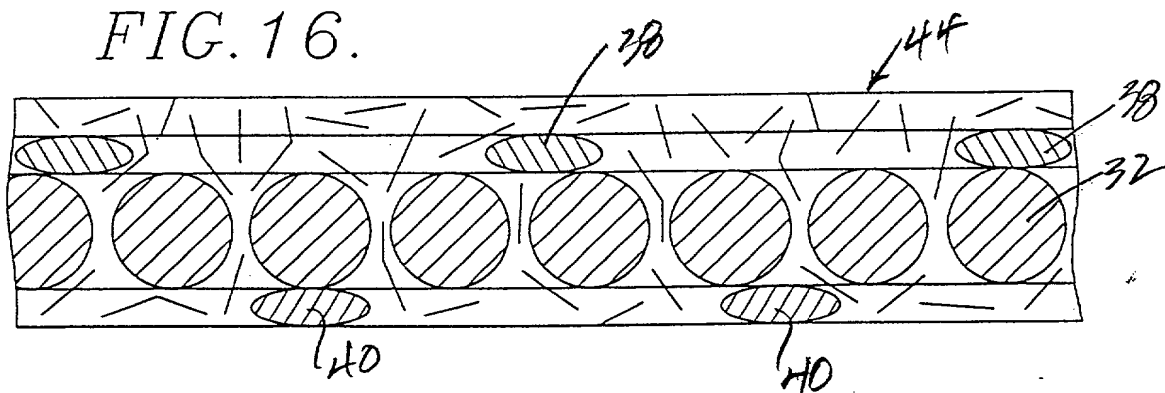

COMBINED DECLARATION AND POWER OF ATTORNEY(Original, Design, National Stage of PCT
or CIP Application)**ATTORNEY'S DOCKET NO.**

30408

As a below named inventor I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PULTRUDED PART AND METHOD OF PREPARING A REINFORCEMENT MAT FOR THE PART

the specification of which: (complete (a), (b) or (c) for type of application)

REGULAR OR DESIGN APPLICATION(a) ☐ is attached hereto.(b) ☐ was filed on _____ as Application Serial No.
and was amended on _____ (if applicable).**PCT FILED APPLICATION ENTERING NATIONAL PHASE**(c) ☐ was described and claimed in International Application No. _____ filed
and as amended on _____ (if any).**ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR**

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

☐ In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

(complete (d) or (e))

(d) ☒ no such applications have been filed.(e) ☐ such applications have been filed as follows**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS PRIOR TO SAID APPLICATION**

Country	Application No.	Date of Filing	Date of Issue	Priority Claimed
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS PRIOR TO SAID APPLICATION

PROVISIONAL

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States application(s) listed below:

60/155258	June 21, 1999	Pending
Application Serial No.	Filing Date	Status (patented, pending, abandoned)

CONTINUATION-IN-PART

(Complete This Part Only If This Is A Continuation-In-Part Application)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a), which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
------------------------	-------------	---------------------------------------

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Robert D. Hovey 19,223	Thomas B. Luebbering 37,874
Warren N. Williams 19,156	Andrew G. Colombo
Stephen D. Timmons 26,513	40,565
John M. Collins 6,262	Tracy L. Bornman
Thomas H. Van Hoozer 32,761	

2-


4
2
,
3
4

SEND CORRESPONDENCE TO:
HOVEY, WILLIAMS, TIMMONS & COLLINS
2405 Grand, Suite 400
Kansas City, Missouri 64108

DIRECT TELEPHONE CALLS TO:

(816) 474-9050

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor	Kenneth D. Beer
Inventor's Signature	
Date	Country of Citizenship
June 19, 2000	USA

Residence	210A RD2, Vandergrift, Pennsylvania 15690	
Post Office Address	210A RD2, Vandergrift, Pennsylvania 15690	
Full name of second joint inventor, if any	Laurence W. Davies	
Inventor's Signature		
Date	Country of Citizenship	
Residence	18 Stronsay Place, Winnipeg, Canada R2G 2Y3	
Post Office Address	18 Stronsay Place, Winnipeg, Canada R2G 2Y3	
Full name of third joint inventor, if any	Peter J. Fritz	
Inventor's Signature		
Date	Country of Citizenship USA	
Residence	712 Kettland Kring, Pella, Iowa 50219	
Post Office Address	712 Kettland Kring, Pella, Iowa 50219	
Full name of fourth inventor, if any		
Inventor's Signature		
Date	Country of Citizenship	
Residence		
Post Office Address		

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

COMBINED DECLARATION AND POWER OF ATTORNEY(Original, Design, National Stage of PCT
or CIP Application)**ATTORNEY'S DOCKET NO.****30408**

As a below named inventor I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PULTRUDED PART AND METHOD OF PREPARING A REINFORCEMENT MAT FOR THE PART

the specification of which: (complete (a), (b) or (c) for type of application)

REGULAR OR DESIGN APPLICATION(a) ☒ is attached hereto.

(b) ☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

PCT FILED APPLICATION ENTERING NATIONAL PHASE

(c) ☐ was described and claimed in International Application No. _____ filed _____
and as amended on _____ (if any).

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

☐ In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

(complete (d) or (e))

(d) ☐ no such applications have been filed.(e) ☐ such applications have been filed as follows**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS PRIOR TO SAID APPLICATION**

Country	Application No.	Date of Filing	Date of Issue	Priority Claimed
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS PRIOR TO SAID APPLICATION

PROVISIONAL

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States application(s) listed below:

<u>60/155258</u>	<u>June 21, 1999</u>	<u>Pending</u>
Application Serial No.	Filing Date	Status (patented, pending, abandoned)

CONTINUATION-IN-PART

(Complete This Part Only If This Is A Continuation-In-Part Application)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a), which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
------------------------	-------------	---------------------------------------

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Robert D. Hovey 19,223	Thomas B. Luebbering 37,874
Warren N. Williams 19,156	Andrew G. Colombo 40,565
Stephen D. Timmons 26,513	Tracy L. Bornman
John M. Collins 26,262	
Thomas H. Van Hoozer 32,761	


4
2
,
3
4
7

SEND CORRESPONDENCE TO:
HOVEY, WILLIAMS, TIMMONS & COLLINS
2405 Grand, Suite 400
Kansas City, Missouri 64108

DIRECT TELEPHONE CALLS TO:
(816) 474-9050

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor	Kenneth D. Beer
Inventor's Signature	
Date	Country of Citizenship USA

Residence	210A RD2, Vandergrift, Pennsylvania 15690	
Post Office Address	210A RD2, Vandergrift, Pennsylvania 15690	
Full name of second joint inventor, if any	Laurence W. Davies	
Inventor's Signature		
Date	June 20/00	Country of Citizenship
Residence	18 Stronsay Place, Winnipeg, Canada R2G 2Y3	
Post Office Address	18 Stronsay Place, Winnipeg, Canada R2G 2Y3	
Full name of third joint inventor, if any	Peter J. Fritz	
Inventor's Signature		
Date		Country of Citizenship
Residence	712 Kettland Kring, Pella, Iowa 50219	
Post Office Address	712 Kettland Kring, Pella, Iowa 50219	
Full name of fourth inventor, if any		
Inventor's Signature		
Date		Country of Citizenship
Residence		
Post Office Address		

COMBINED DECLARATION AND POWER OF ATTORNEY
(Original, Design, National Stage of PCT
or CIP Application)

ATTORNEY'S DOCKET NO.
30408

As a below named inventor I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PULTRUDED PART AND METHOD OF PREPARING A REINFORCEMENT MAT FOR THE PART

the specification of which: (complete (a), (b) or (c) for type of application)

REGULAR OR DESIGN APPLICATION

(a) ☒ is attached hereto.

(b) ☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

PCT FILED APPLICATION ENTERING NATIONAL PHASE

(c) ☐ was described and claimed in International Application No. _____ filed _____
and as amended on _____ (if any).

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

☐ In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:
(complete (d) or (e))

(d) ☐ no such applications have been filed.

(e) ☐ such applications have been filed as follows

EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS PRIOR TO SAID APPLICATION

Country	Application No.	Date of Filing	Date of Issue	Priority Claimed
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS PRIOR TO SAID APPLICATION

PROVISIONAL

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States application(s) listed below:

60/155258	June 21, 1999	Pending
Application Serial No.	Filing Date	Status (patented, pending, abandoned)

CONTINUATION-IN-PART

(Complete This Part Only If This Is A Continuation-In-Part Application)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a), which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
------------------------	-------------	---------------------------------------

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Robert D. Hovey	19,223	Thomas B. Luebbering	37,874
Warren N. Williams	19,156	Andrew G. Colombo	40,565
Stephen D. Timmons	26,513	Tracy L. Bornman	42,347
John M. Collins	26,262		
Thomas H. Van Hoozer	32,781		

SEND CORRESPONDENCE TO:
HOVEY, WILLIAMS, TIMMONS & COLLINS
2405 Grand, Suite 400
Kansas City, Missouri 64108

DIRECT TELEPHONE CALLS TO:

(816) 474-9050

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor	Kenneth D. Beer		
Inventor's Signature			
Date	Country of Citizenship USA		
Residence	210A RD2, Vandergrift, Pennsylvania 15690		
Post Office Address	210A RD2, Vandergrift, Pennsylvania 15690		
Full name of second joint inventor, if any	Laurence W. Davies		
Inventor's Signature			
Date	Country of Citizenship		
Residence	18 Stronsay Place, Winnipeg, Canada R2G 2Y3		
Post Office Address	18 Stronsay Place, Winnipeg, Canada R2G 2Y3		

Full name of third joint inventor, if any		Peter J. Fritz
Inventor's Signature <i>Peter J. Fritz</i>		
Date	6-20-00	Country of Citizenship USA
Residence 712 Kettland Kring, Pella, Iowa 50219		
Post Office Address 712 Kettland Kring, Pella, Iowa 50219		
Full name of fourth inventor, if any		
Inventor's Signature		
Date		Country of Citizenship
Residence		
Post Office Address		